

PRODUCT SPECIFICATION SHEET

March 2010



MODEL 6309/6310

ELECTRONIC FLASHERS

Model Number	Description
6309-12/80V	12-80V Electronic Flasher
6310-12/24V	12-24V Electronic Flasher

Applications

- Agricultural
- Construction
- Utility
- Buses
- Material Handling

Features & Benefits


- Multi-voltage configurations add versatility & reduce SKUs
- Standard high-power FET output protects against short circuit & over heating
- 1-year limited warranty

Product Specifications

- Input Voltage: 12-80V DC (6309); 12-24V DC (6310)
- Current Draw: 5 Amps @ 12-80V DC (6309); 15 Amps @ 12-24V DC (6310)
- Flash Rate: 70±10 Flashes Per Minute
- Housing: Polycarbonate
- Mounting: Flat/Panel Mount
- Wiring: Pre-wired with 9" Wire Leads (Standard)

Standards Compliance

- UL Recognized
- SAE (DOT) J2139 (Temperature, Corrosion)
- MIL STD 461F (Radiated Emissions)
- Sealed to IP67

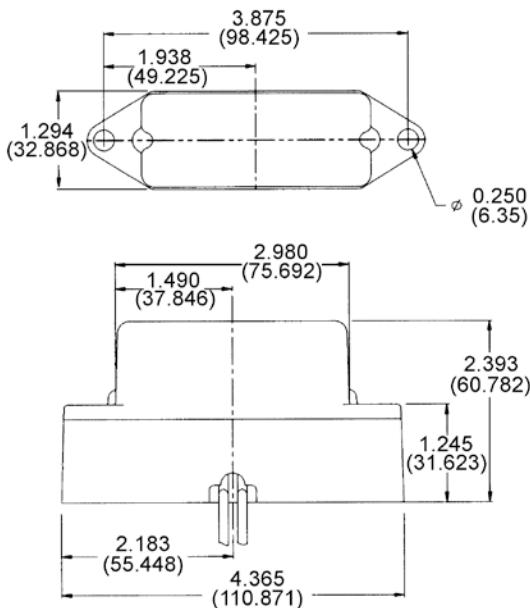

Dimensions in inches (mm in parentheses)
Dimensions are for reference only.

