### PRODUCT INFORMATION

**Description** 12-24 ECE LED LHT High & Low Beam

Headlight with FP & Panel Mount

 Height
 129.79 mm / 5.11 in

 Width
 168.66 mm / 6.64 in

 Depth
 87.38 mm / 3.44 in

Shape Rectangular


Outer Lens Material Polycarbonate


Outer Lens Color Clear
Housing Material Aluminum
Housing Color Black
Bezel Color Black


Mounting TypePanel MountConnector or Wiring12" Flying LeadsProduct Weight2.50 lbs / 1.13 kgsShipping Weight2.84 lbs / 1.29 kgs



### **PRODUCT DIMENSIONS**







## **ELECTRICAL SPECIFICATIONS**

Input Voltage 12-24V DC
Operating Voltage 10-30V DC
Black Wire Ground
White Wire High Beam
Yellow Wire Low Beam
Red Wire Front Position

Current Draw 1.11A @ 12V DC (Low Beam)

0.96A @ 24V DC (Low Beam) 2.14A @ 12V DC (High Beam) 1.56A @ 24V DC (High Beam) 0.056A @ 12V DC (Front Position) 0.065A @ 24V DC (Front Position)

#### **REGULATORY STANDARDS COMPLIANCE**









Buy America Standards ECE Reg 7

IEC IP67

ECE Reg 112 Eco Friendly



### PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2,100 (High Beam); 1,850 (Low

Beam)

**Effective Lumen** 

Output

Beam Pattern(s)


**Lumen** 755 (High Beam); 645 (Low Beam)

Forward Lighting - High Beam (DOT/ECE)

Forward Lighting - Low Beam (ECE

Left Hand)

Signalization - Front Position

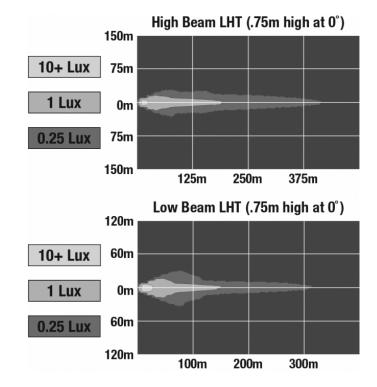

#### **APPLICATIONS**





### **PRODUCT WARNINGS**

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <a href="www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>.



## **RELATED PRODUCTS**



# <u>Part Number</u> <u>0550271</u>

12-24 DOT/ECE LED RHT High & Low Beam Headlight with FP & 3 Point Mount



# Part Number 0550281

12-24 ECE LED LHT High & Low Beam Headlight with FP & 3 Point Mount



# <u>Part Number</u> 0550931

12-24 DOT/ECE LED RHT High & Low Beam Headlight with FP & Panel Mount