

Adaptive LED Headlights – Model 8690 Adaptive 2

PRODUCT INFORMATION

| | |
|--------------------------------------|--|
| Description | 12V DOT/ECE LED High and Low Beam Adaptive Headlight with Chrome Inner Bezel |
| Height | 143.00 mm / 5.63 in |
| Width | 143.00 mm / 5.63 in |
| Depth | 82.50 mm / 3.25 in |
| Shape | Round |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Aluminum |
| Housing Color | Grey |
| Bezel Color | Chrome |
| Retrofits | Bucket 5 3/4" Round Headlights (PAR46) |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Connector or Wiring | H4 |
| Mating Connector | H4, AMP#172615-2 |
| Product Weight | 1.80 lbs / 0.82 kgs |
| Shipping Weight | 2.56 lbs / 1.16 kgs |




Print date: 2018-05-20

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
Engineered. Lighting. Solutions.

Adaptive LED Headlights – Model 8690 Adaptive 2

PRODUCT DIMENSIONS

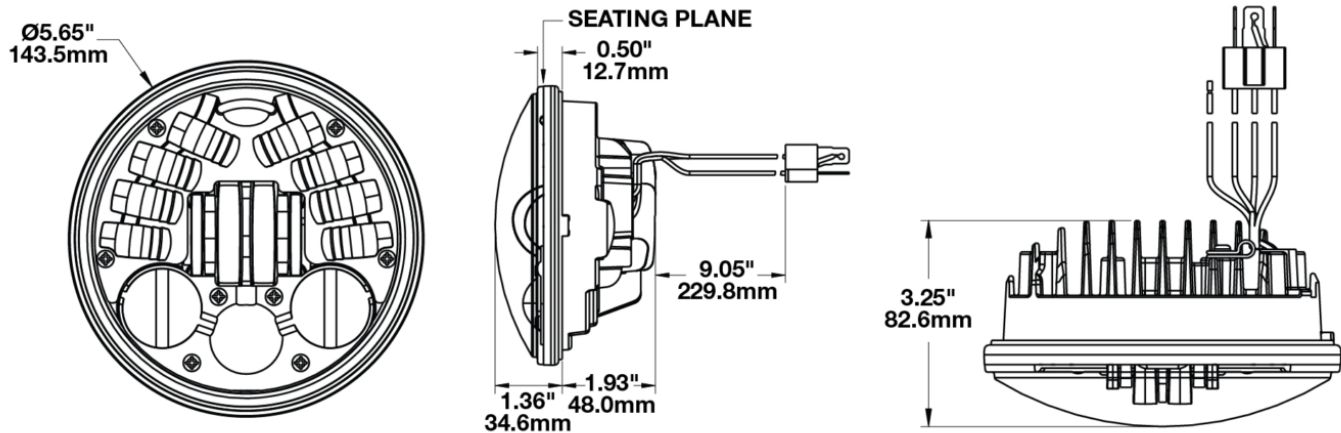

ELECTRICAL SPECIFICATIONS

| | |
|-----------------------------------|---|
| Input Voltage | 12V DC |
| Operating Voltage | 9-16V DC |
| Transient Spike Protection | 150V Peak @ 1 HZ-100 Pulses |
| Black Wire | Ground |
| White Wire | High Beam |
| Yellow Wire | Low Beam |
| Red Wire | Front Position |
| Current Draw | 1.9A @ 12V DC (Low Beam) 3.2A @ 12V DC (High Beam) 0.21A @ 12V DC (Front Position) 4.2A @ 12V DC (Low Beam at Full Lean) 5.5A @ 12V DC (High Beam at Full Lean) |

Print date: 2018-05-20

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

Adaptive LED Headlights – Model 8690 Adaptive 2


REGULATORY STANDARDS COMPLIANCE



| | |
|--|--------------|
| Buy America Standards | ECE Reg 113 |
| ECE Reg 50 | Eco Friendly |
| FMVSS 108 Table XX | IEC IP67 |
| Tested to ECE Reg. 10 (Radiated Emissions only) | |

PHOTOMETRIC SPECIFICATIONS

| | |
|--------------------------------------|---|
| Raw Lumen Output | 3,520 (High Beam); 2,120 (Low Beam) |
| Effective Lumen Output | 1,600 (High Beam); 1,050 (Low Beam) |
| Candela Output | 60,000 (High Beam); 8,300 (Low Beam) |
| Nominal LED Color Temperature | 5000 K |
| Beam Pattern(s) | Forward Lighting - High Beam (DOT/ECE) Forward Lighting - Low Beam (DOT/ECE) Signalization - Front Position |

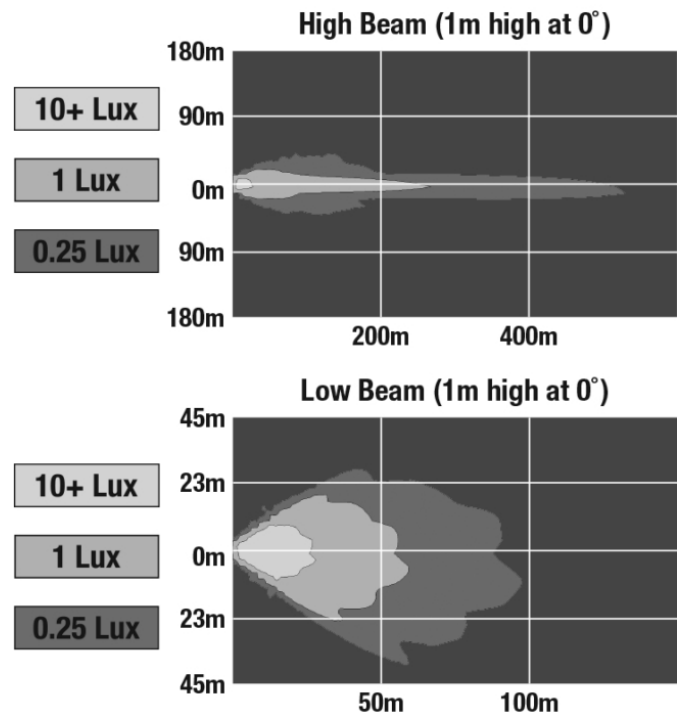

Print date: 2018-05-20

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

Adaptive LED Headlights – Model 8690 Adaptive 2

APPLICATIONS



ADDITIONAL INFORMATION

Improvements over the original Adaptive Series

The NEW Adaptive 2 Series headlights have been improved to feature Adaptive technology when using the high beam, in addition to the low beam. Providing ditch-to-ditch lighting to eliminate dark corners on sharp turns and a punch of light 1,500 feet down the road to give you a safer and more confident ride.

RELATED PRODUCTS



Part Number

0555091

12V DOT/ECE LED High
and Low Beam
Adaptive Headlight
with Black Inner Bezel

Print date: 2018-05-20

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660