



Dimensions in inches (mm in parentheses).
Dimensions are for reference only.

Product List

Model Number	Description
9049-12V	12V 6-Module LED Light Bar
9049-24V	24V 6-Module LED Light Bar

Features & Benefits

- 6,600 raw lumens; 3,960 effective lumens
- Available in 12V DC or 24V DC configurations
- Flood & Driving beam patterns available
- UV-resistant polycarbonate lens
- Rugged solid state LEDs can withstand shock & vibration
- Long-lasting LEDs mean never having to replace another bulb again!
- Die-cast aluminum housing provides maximum protection
- Universal mount
- Programmable or non-programmable version available
- **Also available in [2-module](#) and [4-module](#) configurations**
- Programmable version comes with remote control

General Specifications

Lens Pattern :	Flood or Driving
Lens Material :	Polycarbonate
Warranty:	4-year Limited Warranty
Housing Material :	Die-Cast Aluminum
Mounting :	Universal Mount

Technical Specifications


6-Module 12V Version	6-Module 24V Version
12V DC Input	24V DC Input
12.000 Amps @ 12V DC	7.200 Amps @ 24V DC
Raw Lumen Output: 6,600	Raw Lumen Output: 6,600
Effective Lumen Output: 3,960	Effective Lumen Output: 3,960

Standards Compliance

SAE J1113 (Class 21)	ECE Reg. 10
----------------------	-------------

Applications

Agricultural	Construction	Fire & Rescue
Forestry	Industrial	Military
Mining	Off-Highway	On-Highway
Recreational	Specialty Trucks	Utility

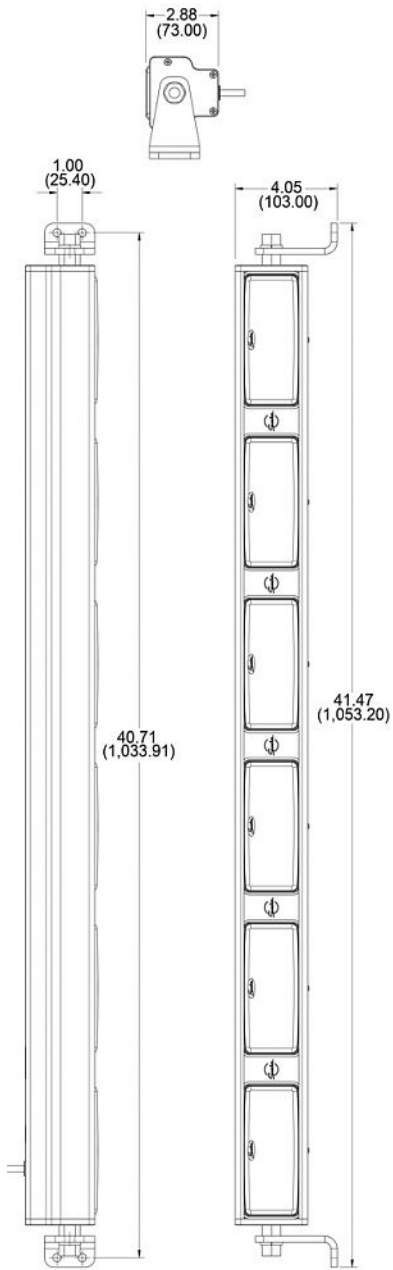


Dimensions in inches (mm in parentheses).
Dimensions are for reference only.

Model 9049


2 Module (Flood) (2.0m high, -5°)

23.09 Max.

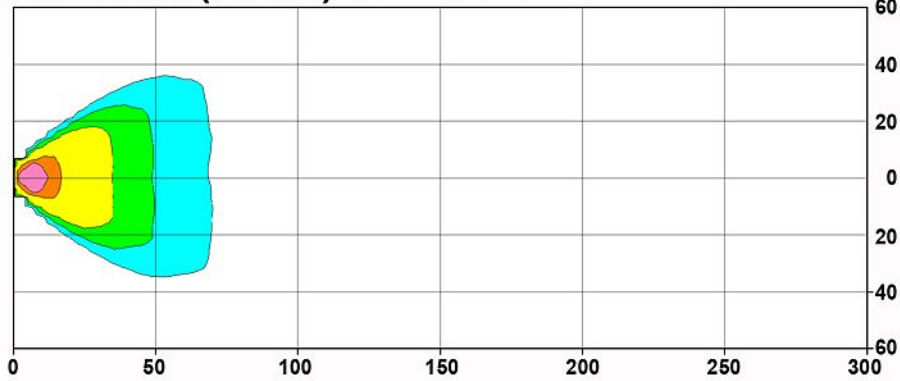


4 Module (Flood) (2.0m high, -5°)

46.65 Max.

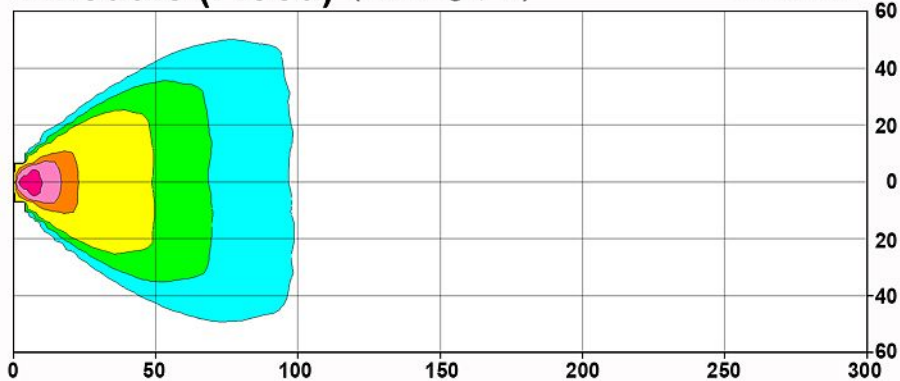

6 Module (Flood) (2.0m high, -5°)

70.44 Max.

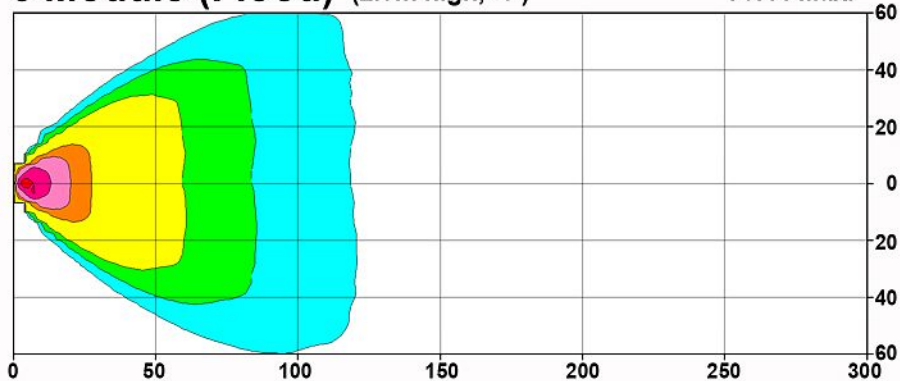

0.25 0.50 1.0 5.0 10 25 50 Lux