


LED Work Light - Model 6020

PRODUCT INFORMATION

| | |
|--------------------------------------|---|
| Description | 12-24V LED Work Light with Flood Beam Pattern |
| Height | 162.56 mm / 6.4 in |
| Width | 112.01 mm / 4.41 in |
| Depth | 76.20 mm / 3 in |
| Shape | Vertical Oval |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Die-Cast Aluminum |
| Housing Color | Black |
| Mounting Hardware Description | (x1) M12-1.75 x 41 Hollow Mounting Bolt |
| Mounting Type | Universal Pedestal Mount |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Mating Connector | Packard (#12059183) |
| Shipping Weight | 2.50 lbs / 1.13 kgs |



PRODUCT DIMENSIONS

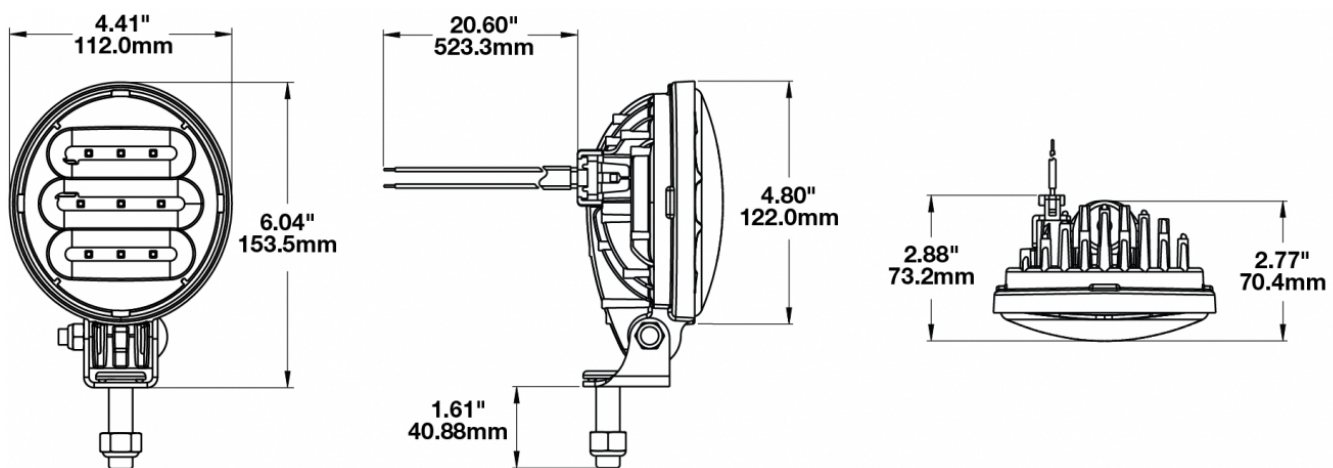

Print date: 2017-11-25

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Work Light - Model 6020

ELECTRICAL SPECIFICATIONS

| | |
|-----------------------------------|----------------------------------|
| Input Voltage | 12-24V DC |
| Operating Voltage | 9-32V DC |
| Transient Spike Protection | 150V Peak @ 1 HZ-100 Pulses |
| Red Wire | Positive |
| Black Wire | Negative |
| Current Draw | 2.33A @ 12V DC 1.07A @ 24V DC |

REGULATORY STANDARDS COMPLIANCE




Buy America Standards
IEC IP67

Eco Friendly
Tested to ECE Reg. 10
(Radiated Emissions only)

PHOTOMETRIC SPECIFICATIONS

| | |
|--------------------------------------|-------------------------------------|
| Raw Lumen Output | 3,150 |
| Effective Lumen Output | 2,130 |
| Nominal LED Color Temperature | 5000 K |
| Beam Pattern(s) | Forward Lighting - Flood (Standard) |

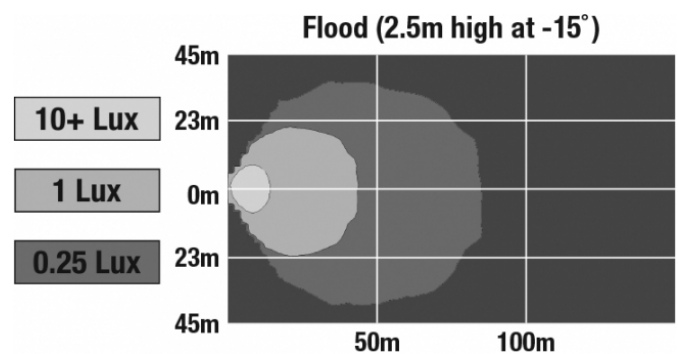

Print date: 2017-11-25

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Work Light - Model 6020

APPLICATIONS

