




Model 240 Low Profile Strobe Light (Front View)

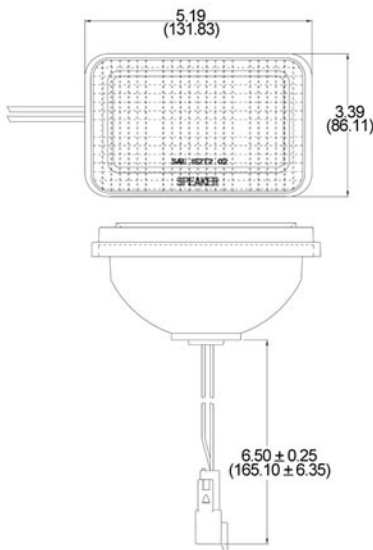

Dimensions in inches (mm in parentheses).
Dimensions are for reference only.

Product List

Model Number	Description
240-12V	12V Low Profile Strobe Light

Features & Benefits

- 135 flashes per minute
- Available in a 12V DC configuration
- UV-resistant polycarbonate lens
- Value-priced to fit any budget
- Impact-resistant nylon housing
- Low profile mount
- Rubber flange allows 1/16" to 3/16" panel thickness

General Specifications

Lens Material :	Polycarbonate
Warranty:	1-Year Limited Warranty
Housing Material :	Impact-Resistant Nylon
Mounting :	Low Profile Mount
Wiring:	12" Bare Leads

Technical Specifications

240-12V
 12V DC Input
 Flash Rate: Other: 135 fpm
 Flash Energy: 2.5 joules @ 12V

Applications

Agricultural	Construction	Fire & Rescue
Forestry	Lawn & Garden	Material Handling
Mining	Off-Highway	Recreational
Specialty Trucks	Utility	