



Flasher Control Module - Model 6309

PRODUCT INFORMATION

| | |
|--------------------------------------|-------------------------------|
| Description | 12-80V Flasher Control Module |
| Height | 28.70 mm / 1.13 in |
| Width | 111.00 mm / 4.37 in |
| Depth | 33.27 mm / 1.31 in |
| Housing Material | Polycarbonate |
| Mounting Type | Low Profile Mount |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Connector or Wiring | 9" Bare Leads |
| Product Weight | 0.42 lbs / 0.19 kgs |

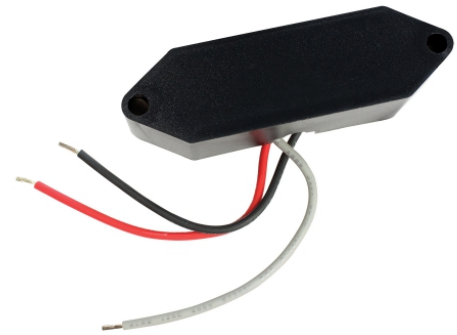

PRODUCT DIMENSIONS

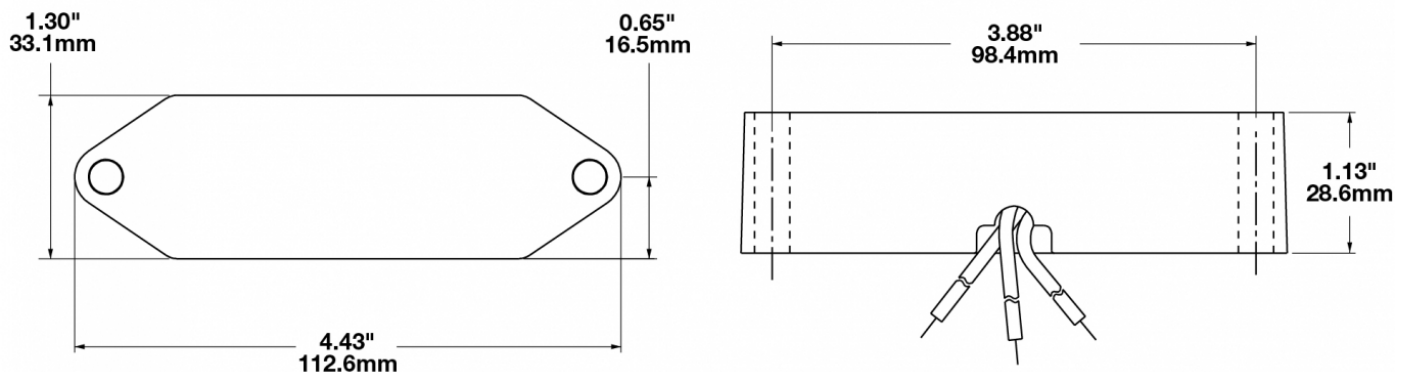

Print date: 2017-07-24

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

Flasher Control Module - Model 6309

ELECTRICAL SPECIFICATIONS

| | |
|----------------------|----------------|
| Input Voltage | 12-48V DC |
| Current Draw | 5A @ 12V DC |
| | 5A @ 24V DC |
| | 5A @ 36V DC |
| | 5A @ 48V DC |
| | 5.00A @ 60V DC |
| | 5.00A @ 80V DC |

REGULATORY STANDARDS COMPLIANCE




Buy America Standards IEC IP67
 MIL-STD 461 UL Recognized

PHOTOMETRIC SPECIFICATIONS

Flash Rate 1 70 +/- 10 fpm

APPLICATIONS

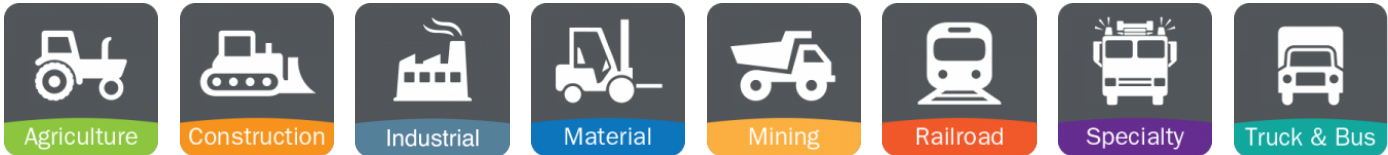

Print date: 2017-07-24

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

