


# Flasher Control - Model 6310

## PRODUCT INFORMATION

|                            |                        |
|----------------------------|------------------------|
| <b>Description</b>         | 12-24V Flasher Control |
| <b>Height</b>              | 60.71 mm / 2.39 in     |
| <b>Width</b>               | 109.47 mm / 4.31 in    |
| <b>Depth</b>               | 31.75 mm / 1.25 in     |
| <b>Housing Material</b>    | Polycarbonate          |
| <b>Housing Color</b>       | Black                  |
| <b>Mounting Type</b>       | Low Profile Mount      |
| <b>Connector or Wiring</b> | 9" Bare Leads          |
| <b>Product Weight</b>      | 0.42 lbs / 0.19 kgs    |



## PRODUCT DIMENSIONS

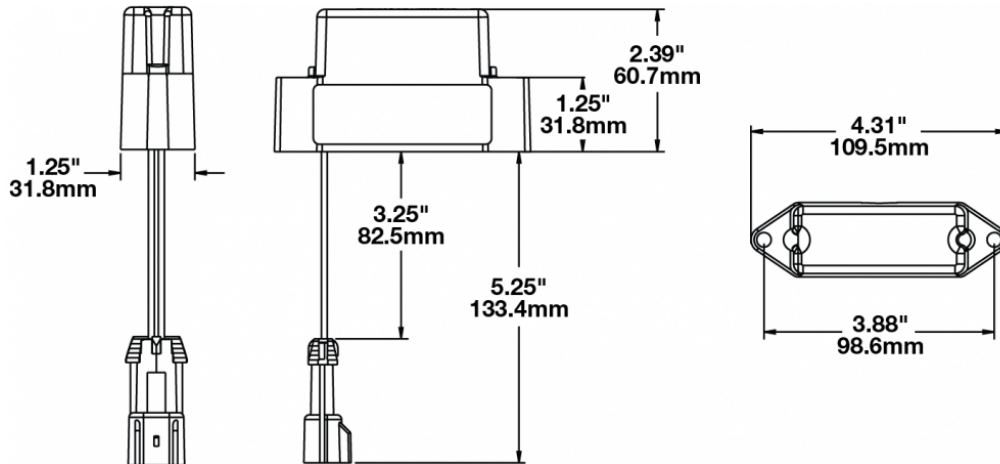

Print date: 2017-06-26

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.  
[www.jwspeaker.com](http://www.jwspeaker.com) • [speaker@jwspeaker.com](mailto:speaker@jwspeaker.com) • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# Flasher Control - Model 6310

## ELECTRICAL SPECIFICATIONS

---

**Input Voltage** 12-24V DC  
**Current Draw** 15A @ 12V DC

## REGULATORY STANDARDS COMPLIANCE

---



Buy America Standards MIL-STD 461


## PHOTOMETRIC SPECIFICATIONS

---

**Flash Rate 1** 70 +/- 10 fpm

## APPLICATIONS

---

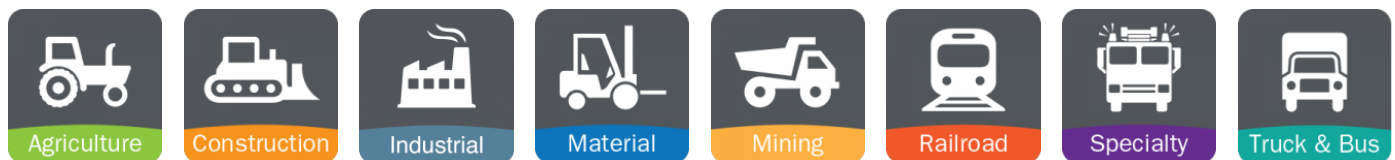

---

**Print date: 2017-06-26**

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660