

Dimensions in inches (mm in parentheses).  
Dimensions are for reference only.

### Product List

Model Number	Description
7100/H4-12V	12V Halogen High/Low Headlight (H4-12V Sealed Beam)
7100/H4-24V	24V Halogen High/Low Headlight (H4-24V Sealed Beam)

### Features & Benefits

- 1,650 Raw Lumens; 840 Effective Lumens
- Available in 12V DC or 24V DC configurations
- Durable glass lens stands up to harsh environmental conditions
- This high quality halogen light will fit any budget!
- Durable PEI housing
- 24V version is available in top or bottom mount; 12V versions are bottom mount only
- Right-hand and left-hand traffic configurations available

### General Specifications

<b>Lens Material :</b>	Glass
<b>Warranty:</b>	1-Year Limited Warranty
<b>Housing Material :</b>	PEI
<b>Mounting Hardware:</b>	(x1) M8-1.25 x 20mm Mounting Bolt
<b>Mounting :</b>	Universal Mount
<b>Mating Connector:</b>	AMP 172516-2 or equivalent

### Technical Specifications

#### H4-12V Bulb Version

12V DC Input  
 4.580 Amps (Low Beam); 5.000 Amps (High Beam) @ 12V DC  
 Raw Lumen Output: 1,000 (Low Beam); 1,650 (High Beam)  
 Effective Lumen Output: 340 (Low Beam); 840 (High Beam)  
 Bulb Replacement: H4-12V Halogen Bulb

#### H4-24V Bulb Version

24V DC Input  
 3.130 Amps (Low Beam); 2.920 Amps (High Beam) @ 24V DC  
 Bulb Replacement: H4-24V Halogen Bulb

### Standards Compliance

Buy America Compliant  
 ECE Reg. 112

SAE J575


### Applications

Agricultural	Construction	Fire & Rescue
Forestry	Industrial	On-Highway
Recreational	Specialty Trucks	Utility

# Model 7100

**High Beam Pattern** (1.0m high, -0°)

24.7 Max.

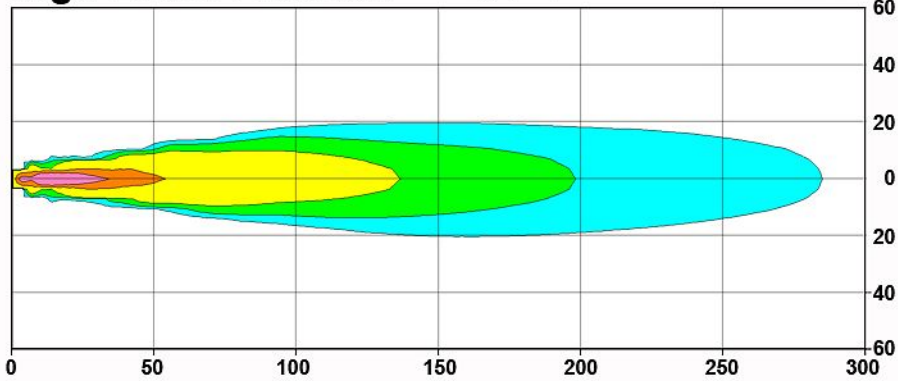

**Low Beam Pattern** (1.0m high, -0°)

46.2 Max.

