



LED Auxiliary Lights - Model 6048

PRODUCT INFORMATION

Description	12-24V LED Auxiliary Light with Driving Beam Pattern
Height	63.25 mm / 2.49 in
Width	138.18 mm / 5.44 in
Depth	55.63 mm / 2.19 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Type	Flush Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Bare Leads
Product Weight	0.71 lbs / 0.32 kgs
Shipping Weight	0.92 lbs / 0.42 kgs

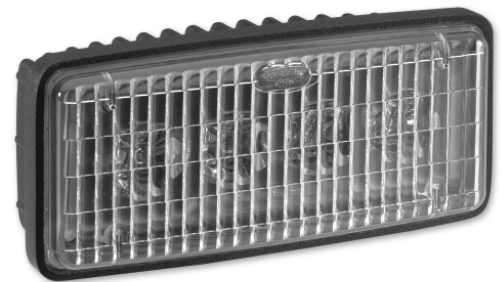

PRODUCT DIMENSIONS

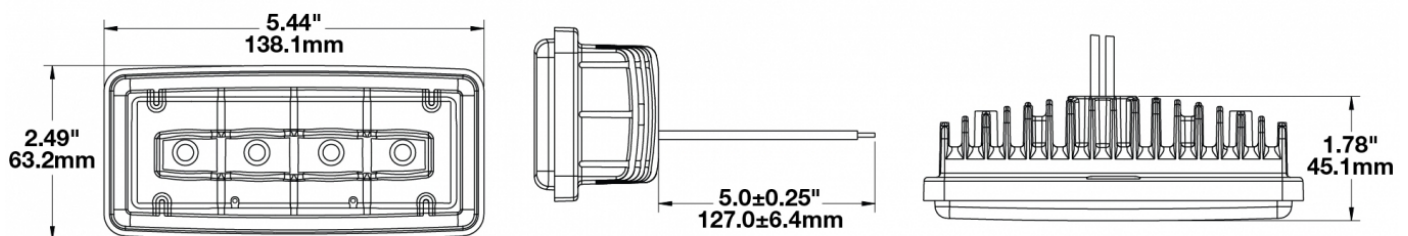

Print date: 2018-11-17

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Auxiliary Lights - Model 6048

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	9-32V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Red Wire	Positive
Black Wire	Negative
Current Draw	1.2A @ 12V DC 0.6A @ 24V DC

REGULATORY STANDARDS COMPLIANCE




Buy America Standards
IEC IP67

Eco Friendly
Tested to ECE Reg. 10
(Radiated Emissions only)

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	1,280
Effective Lumen Output	430
Candela Output	3,000
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - Driving

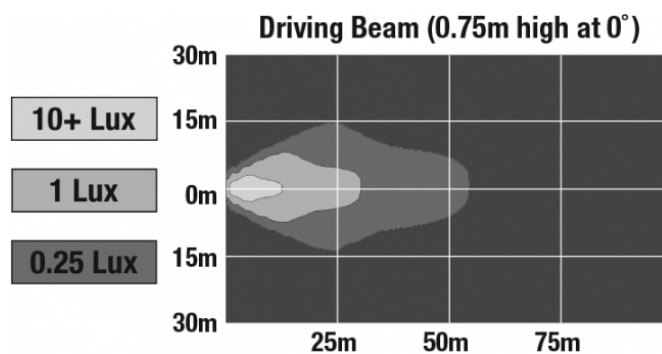

Print date: 2018-11-17

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Auxiliary Lights - Model 6048

APPLICATIONS



RELATED PRODUCTS



Part Number
0548631
12-24V LED Auxiliary
Light with Spot Beam
Pattern



Part Number
0549691
12V SAE/ECE LED
Auxiliary Light with Fog
Beam Pattern

Print date: 2018-11-17

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660