


# LED Dome Light - Model 282

## PRODUCT INFORMATION

<b>Description</b>	12-24V LED Dome Light
<b>Height</b>	215.90 mm / 8.5 in
<b>Width</b>	49.53 mm / 1.95 in
<b>Depth</b>	27.94 mm / 1.1 in
<b>Shape</b>	Rectangular
<b>Outer Lens Material</b>	Acrylic
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	ABS
<b>Housing Color</b>	Black
<b>Mounting Type</b>	Low Profile Mount
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Connector or Wiring</b>	Optional 2-Pin Deutsch Socket (DT04-2P); 3-Pin Deutsch Socket (DT04-3P)
<b>Mating Connector</b>	Optional 2-Pin Deutsch Plug (DT06-2S); 3-Pin Deutsch Plug (DT06-3S)
<b>Product Weight</b>	0.30 lbs / 0.14 kgs



## PRODUCT DIMENSIONS

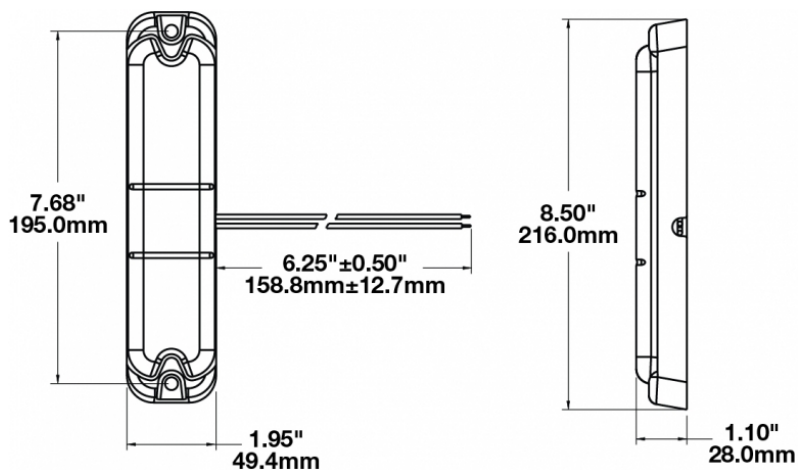

Print date: 2017-11-25

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Dome Light - Model 282

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	12-24V DC
<b>Red Wire</b>	Positive
<b>Black Wire</b>	Negative

## REGULATORY STANDARDS COMPLIANCE




Buy America Standards  
IEC IP66

Eco Friendly

## PHOTOMETRIC SPECIFICATIONS

<b>Nominal LED Color Temperature</b>	5000 K
<b>Beam Pattern(s)</b>	Interior - Dome Light

## APPLICATIONS

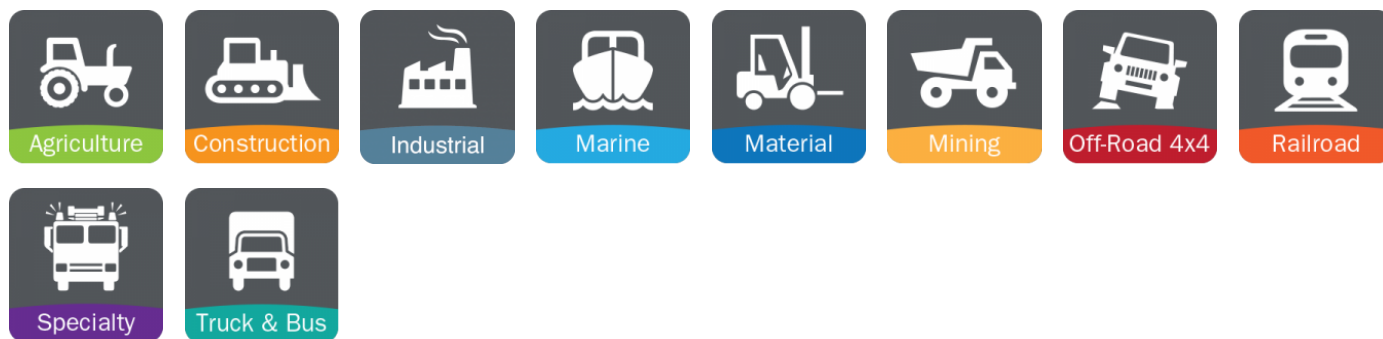

Print date: 2017-11-25

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
Engineered. Lighting. Solutions.