


LED Dome Lights - Model 410

PRODUCT INFORMATION

| | |
|--------------------------------------|---|
| Description | 12-24V LED Dome Light |
| Height | 75.44 mm / 2.97 in |
| Width | 165.35 mm / 6.51 in |
| Depth | 24.64 mm / 0.97 in |
| Shape | Rectangular |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Polycarbonate |
| Housing Color | Black |
| Mounting Hardware Description | (x2) #8-32 x Phillips Taptite Mounting Screws |
| Mounting Type | Flush Mount |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Connector or Wiring | MOLEX P/N 190250004 |
| Mating Connector | MOLEX P/N 190170014 |
| Product Weight | 0.21 lbs / 0.1 kgs |
| Shipping Weight | 0.90 lbs / 0.41 kgs |

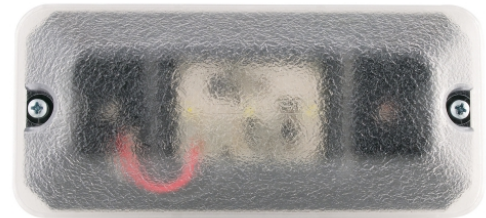


Print date: 2018-02-22

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
Engineered. Lighting. Solutions.

LED Dome Lights - Model 410

PRODUCT DIMENSIONS

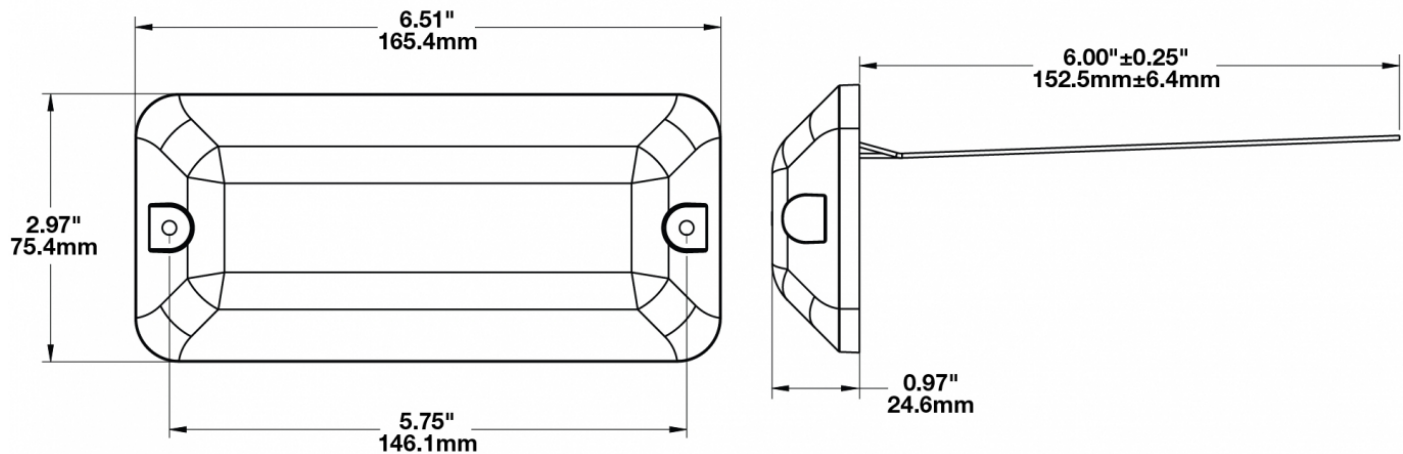

ELECTRICAL SPECIFICATIONS

| | |
|-----------------------------------|----------------------------------|
| Input Voltage | 12-24V DC |
| Operating Voltage | 9-32V DC |
| Transient Spike Protection | 150V Peak @ 1 HZ-100 Pulses |
| Red Wire | Positive |
| Black Wire | Negative |
| Current Draw | 0.14A @ 12V DC 0.09A @ 24V DC |

REGULATORY STANDARDS COMPLIANCE



Buy America Standards
Eco Friendly

ECE Reg 10
Tested to ECE Reg. 10
(Radiated Emissions only)

Print date: 2018-02-22


© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Dome Lights - Model 410

PHOTOMETRIC SPECIFICATIONS

Nominal LED Color Temperature 5000 K
Beam Pattern(s) Interior - Dome Light

APPLICATIONS

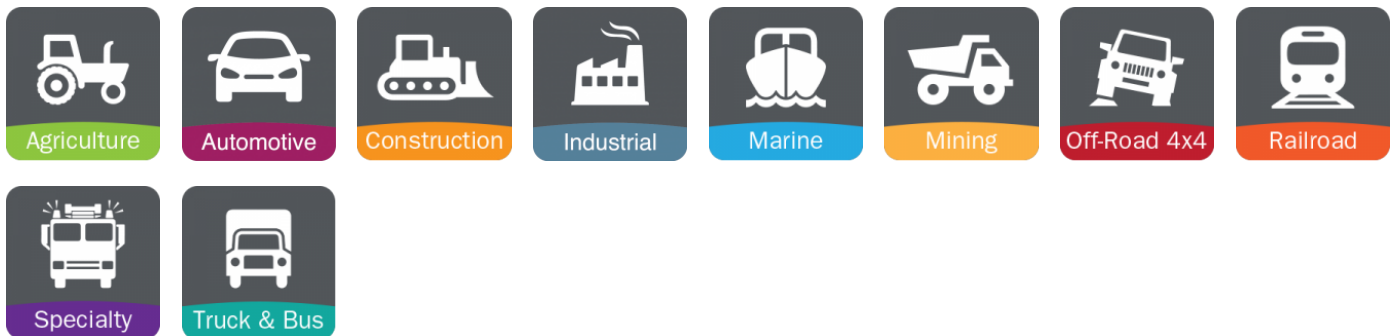

Print date: 2018-02-22

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660