


LED Dual Beam Work Light - Model 776 XD

PRODUCT INFORMATION

Description	12-24V LED Dual Beam Work Light
Height	180.34 mm / 7.1 in
Width	99.57 mm / 3.92 in
Depth	58.42 mm / 2.3 in
Shape	Oval
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Mounting Hardware Description	(x1) 5/16"-18 x 1.00" Mounting Bolt
Mounting Type	Universal Pedestal Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Integrated 3-Pin Deutsch Weather-Proof Socket (DT04-3P)
Mating Connector	3-Pin Deutsch Weather-Proof Plug (DT06-3S)



PRODUCT DIMENSIONS

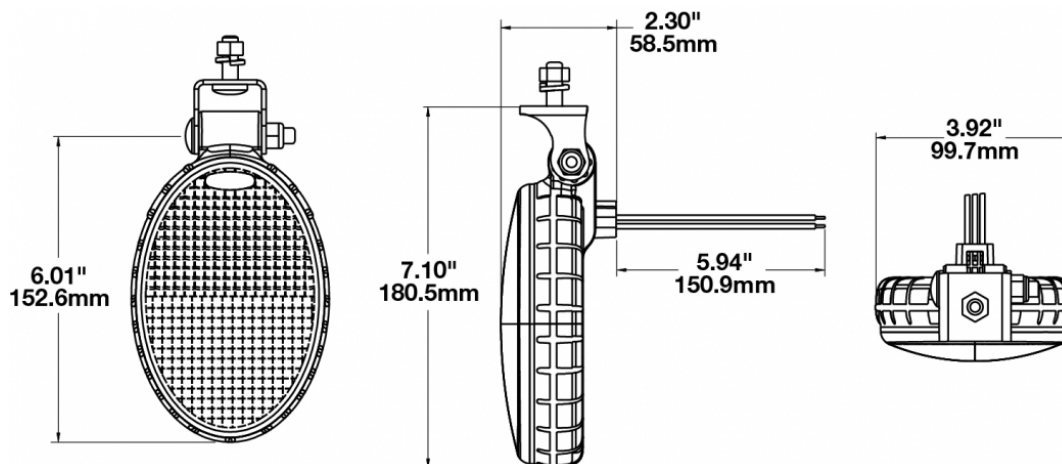

Print date: 2017-07-24

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Dual Beam Work Light - Model 776 XD

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	9-32V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
White Wire	Low Beam
Red Wire	High Beam
Black Wire	Ground
Current Draw	1.50A @ 12V DC (Dual Beam) 0.73A @ 24V DC (Dual Beam) 0.77A @ 12V DC (Single Beam) 0.37A @ 24V DC (Single Beam)


REGULATORY STANDARDS COMPLIANCE



Buy America Standards	CISPR 12
CISPR 22	ECE Reg 6
Eco Friendly	IEC IP67
UL Recognized	

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	1,440
Effective Lumen Output	250 (top beam); 370 (bottom beam); 620 (dual beam)
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - Dual Beam

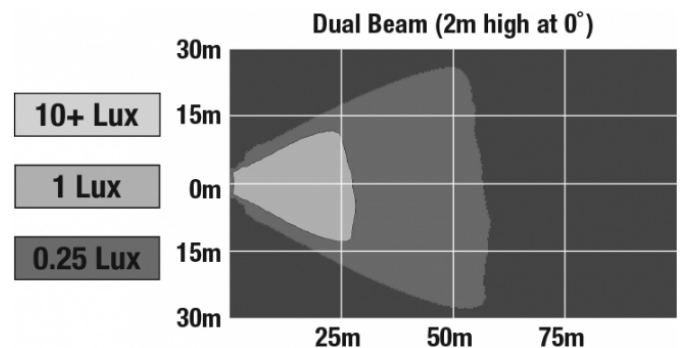

Print date: 2017-07-24

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Dual Beam Work Light - Model 776 XD

APPLICATIONS



Agriculture



Construction



Industrial



Material



Mining



Off-Road 4x4



Railroad



Specialty



Truck & Bus

ACCESSORIES



Part Number

8200011

Magnet Mount Kit for
XD Series Work Lights