

LED Emergency & Warning Light - Model 8750

PRODUCT INFORMATION

| | |
|--------------------------------------|------------------------------------------------|
| Description | 24V LED Amber Arrow Warning Light - Model 8750 |
| Height | 177.20 mm / 6.98 in |
| Width | 177.20 mm / 6.98 in |
| Depth | 108.60 mm / 4.28 in |
| Shape | Round |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Amber |
| Housing Material | Glass Fill Polycarbonate |
| Housing Color | Black |
| Mounting Hardware Description | (x3) M6-1 x 26.5 |
| Mounting Type | Panel |
| Minimum Operating Temperature | -45 °C / -49 °F |
| Maximum Operating Temperature | 85 °C / 185 °F |
| Connector or Wiring | 118mm Instrument Cable with Flying Leads |
| Shipping Weight | 1.50 lbs / 0.68 kgs |
| Additional Information | CE Ready IP67, IP69k |




Print date: 2018-04-21

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
Engineered. Lighting. Solutions.

LED Emergency & Warning Light - Model 8750

PRODUCT DIMENSIONS

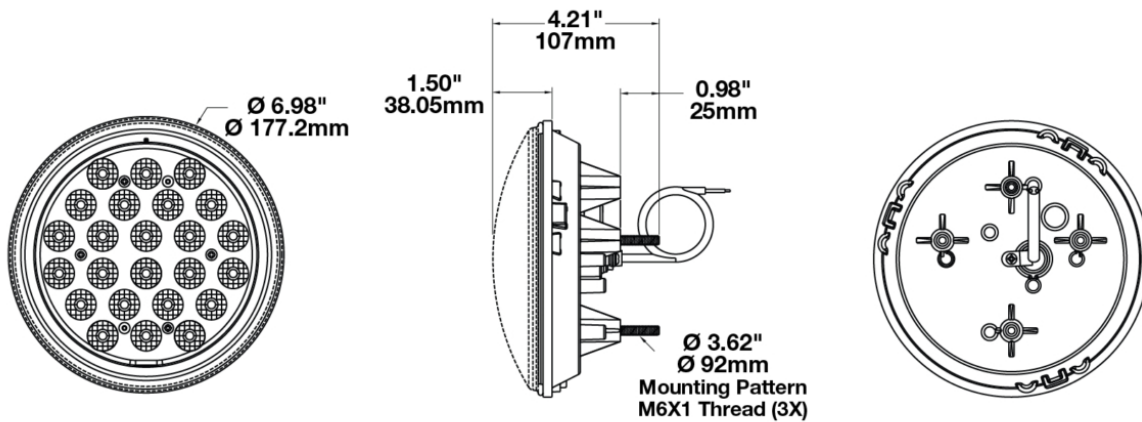

ELECTRICAL SPECIFICATIONS

| | |
|----------------------|-------------|
| Input Voltage | 24 V |
| Red Wire | Power |
| Black Wire | Ground |
| Current Draw | 0.80A @ 24V |

REGULATORY STANDARDS COMPLIANCE



Buy America Standards

Eco Friendly

Print date: 2018-04-21

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Emergency & Warning Light - Model 8750

PHOTOMETRIC SPECIFICATIONS

| | |
|-------------------------------|----------------------------|
| Raw Lumen Output | 900 |
| Effective Lumen Output | 450 |
| Candela Output | 3000 |
| Beam Pattern(s) | Warning - Flashing Warning |

APPLICATIONS

