LED Headlights - Model 8415 Evolution

PRODUCT INFORMATION

Description 12-24V SAE/ECE LED High/Low Beam

Light with Xenoy Housing & Adjustable

Mount

 Height
 119.63 mm / 4.71 in

 Width
 111.25 mm / 4.38 in

 Depth
 72.90 mm / 2.87 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens ColorClearHousing MaterialXenoyHousing ColorBlack

Mounting TypeAdjustable MountRetrofitsLarge VehiclesMinimum Operating-40 °C / -40 °F

Temperature

Maximum Operating 65 °C / 149 °F

Temperature

Mating ConnectorPE 12110293Shipping Weight1.10 lbs / 0.5 kgs

Additional Information Lamp meets SAE J1623, SAE J2258,


ASABE S608, ECE Reg 113 Class C. Adjustable Mount is needed for larger vehicles in order to modify pattern as

needed.



LED Headlights - Model 8415 Evolution

PRODUCT DIMENSIONS

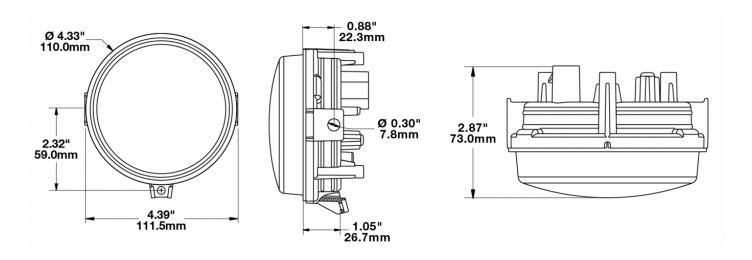

ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage10-30V DC

Current Draw 1.14A @ 12V DC (High Beam)

0.41A @ 12V DC (Low Beam) 0.57A @ 24V DC (High Beam) 0.22A @ 24V DC (Low Beam)

REGULATORY STANDARDS COMPLIANCE












ASABE S608 Buy America Standards

ECE Reg 113 Eco Friendly IEC IP67 SAE J1623

SAE J2258



LED Headlights - Model 8415 Evolution

PHOTOMETRIC SPECIFICATIONS

Effective Lumen

Output

Nominal LED Color Temperature

Beam Pattern(s)

Raw Lumen Output 1,075 (High Beam); 430 (Low Beam) 720 (High Beam); 240 (Low Beam)


5000 K

Forward Lighting - High Beam

(DOT/ECE)

Forward Lighting - Low Beam (DOT) Forward Lighting - Low Beam (ECE

Right Hand)

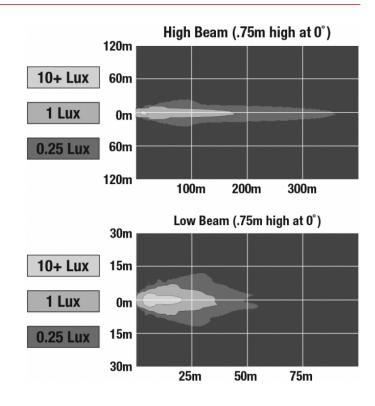

RELATED PRODUCTS



Part Number 0551761 12-24V SAE/ECE LED High/Low Beam Light with Xenoy Housing & Fixed Panel Mount



Part Number 0552031 12-24V SAE/ECE LED High/Low Beam Light with Polycarbonate Housing & Adjustable Mount - UL Version

