



# LED Signal Lights - Model 272

## PRODUCT INFORMATION

<b>Description</b>	24V ECE/SAE LED Turn Signal Light
<b>Height</b>	57.91 mm / 2.28 in
<b>Width</b>	165.10 mm / 6.5 in
<b>Depth</b>	40.13 mm / 1.58 in
<b>Shape</b>	Rectangular
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Amber
<b>Housing Material</b>	Impact-Resistant Nylon
<b>Housing Color</b>	Black
<b>Mounting Hardware Description</b>	#10 or M5-Mounting Screw
<b>Mounting Type</b>	Low Profile Mount
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Connector or Wiring</b>	Integrated Delphi Socket
<b>Mating Connector</b>	Delphi (#12059595), Packard (#1211029 )
<b>Product Weight</b>	0.33 lbs / 0.15 kgs

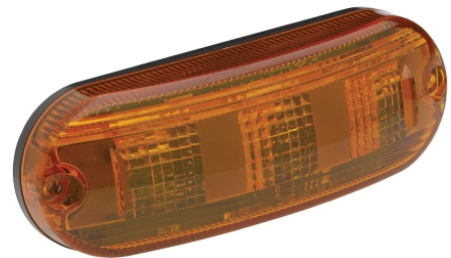

## PRODUCT DIMENSIONS

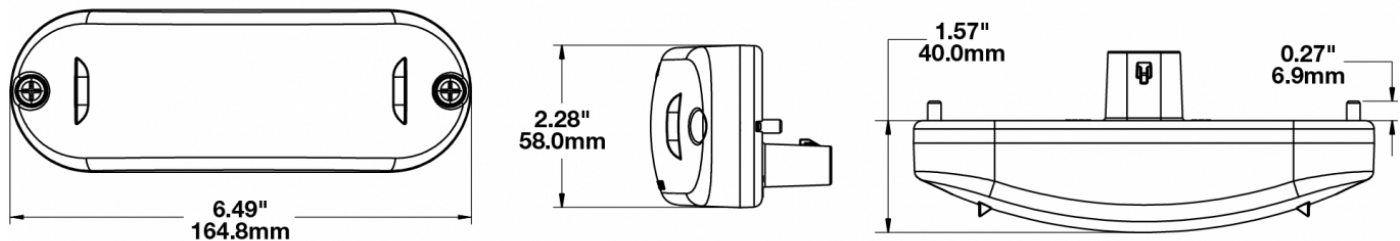

Print date: 2017-06-23

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# LED Signal Lights - Model 272

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	24V DC
<b>Black Wire</b>	Ground
<b>Red Wire</b>	Turn
<b>Current Draw</b>	0.224A @ 24V DC

## REGULATORY STANDARDS COMPLIANCE




ASABE S279	Buy America Standards
ECE Reg 6	Eco Friendly
FMVSS 108 Table VII	IEC IP67
SAE J1889	SAE J2261
SAE J575	SAE J588
SAE J974	

## PHOTOMETRIC SPECIFICATIONS

<b>Beam Pattern(s)</b>	Signalization - Turn (Rear) Warning - Flashing Warning
------------------------	---

## APPLICATIONS

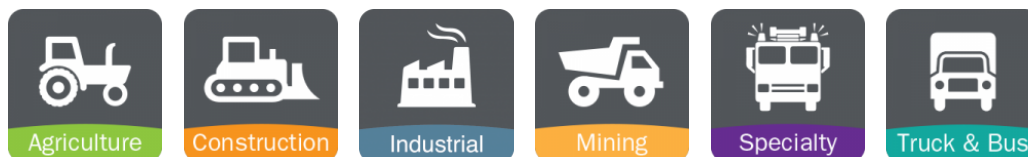

Print date: 2017-06-23

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
Engineered. Lighting. Solutions.

# LED Signal Lights - Model 272

## RELATED PRODUCTS

---



**Part Number**  
**0341801**  
12V ECE/SAE LED Turn  
Signal Light



**Part Number**  
**0341811**  
12V ECE/SAE LED Stop  
& Tail Light