


# LED Stop, Tail, Turn & Backup Lights - Model 280

## PRODUCT INFORMATION

<b>Description</b>	12V LED Stop, Tail, Turn Signal & Backup Light - GM
<b>Height</b>	189.23 mm / 7.45 in
<b>Width</b>	49.02 mm / 1.93 in
<b>Depth</b>	22.10 mm / 0.87 in
<b>Shape</b>	Rectangular
<b>Outer Lens Material</b>	Acrylic
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	ABS
<b>Housing Color</b>	Black
<b>Mounting Type</b>	Low Profile Mount
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Connector or Wiring</b>	Integrated Packard Socket
<b>Mating Connector</b>	Packard (#12052848)
<b>Product Weight</b>	0.28 lbs / 0.13 kgs



## PRODUCT DIMENSIONS

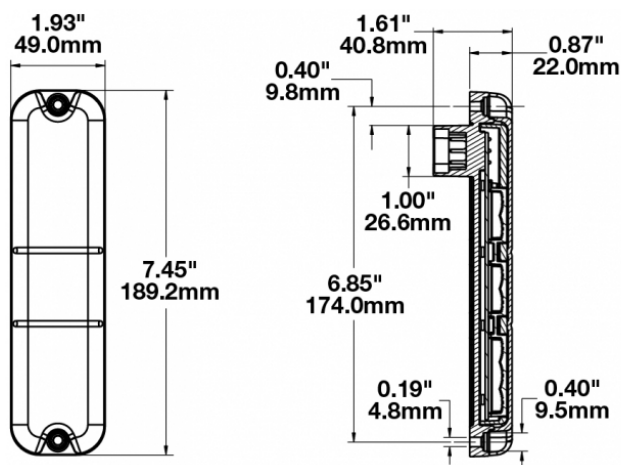

Print date: 2018-06-23

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
[www.jwspeaker.com](http://www.jwspeaker.com) • [speaker@jwspeaker.com](mailto:speaker@jwspeaker.com) • 262.251.6660

# LED Stop, Tail, Turn & Backup Lights - Model 280

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	12V DC
<b>Operating Voltage</b>	9-16V DC
<b>Current Draw</b>	0.105 A @ 12V DC (Stop) 0.020A @ 12V DC (Tail) 0.105A @ 12V DC (Turn) 0.090A @ 12V DC (Backup)

## REGULATORY STANDARDS COMPLIANCE




Buy America Standards	Eco Friendly
IEC IP66	SAE J1455
SAE J1889	SAE J575
UL Recognized	

## PHOTOMETRIC SPECIFICATIONS

<b>Beam Pattern(s)</b>	Signalization - Stop Signalization - Tail Signalization - Turn (Front) Signalization - Turn (Rear)
------------------------	---

## APPLICATIONS

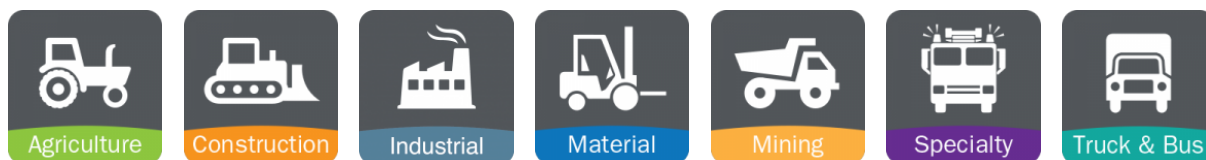

Print date: 2018-06-23

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
Engineered. Lighting. Solutions.

# LED Stop, Tail, Turn & Backup Lights - Model 280

## RELATED PRODUCTS

---



**Part Number**

**0346561**

12V LED Stop, Tail,  
Turn Signal & Backup  
Light