

LED Work Light - Model 502

PRODUCT INFORMATION

Description	12-48V LED Work Light with Trapezoid Beam Pattern
Height	132.59 mm / 5.22 in
Width	132.59 mm / 5.22 in
Depth	43.18 mm / 1.7 in
Shape	Round
Outer Lens Material	Glass
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Retrofits	PAR36 Worklights
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	11" Bare Leads



ELECTRICAL SPECIFICATIONS

Input Voltage	12-48V DC
Operating Voltage	10-60V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Red Wire	Positive
Black Wire	Negative
Current Draw	1.04A @ 12V DC 0.5A @ 24V DC 0.33A @ 36V DC 0.26A @ 48V DC

Print date: 2017-09-26

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Work Light - Model 502

REGULATORY STANDARDS COMPLIANCE




Buy America Standards
UL Recognized

Eco Friendly

PHOTOMETRIC SPECIFICATIONS

- Raw Lumen Output** 1,500
- Effective Lumen Output** 1,070
- Nominal LED Color Temperature** 5000 K
- Beam Pattern(s)** Forward Lighting - Trapezoid

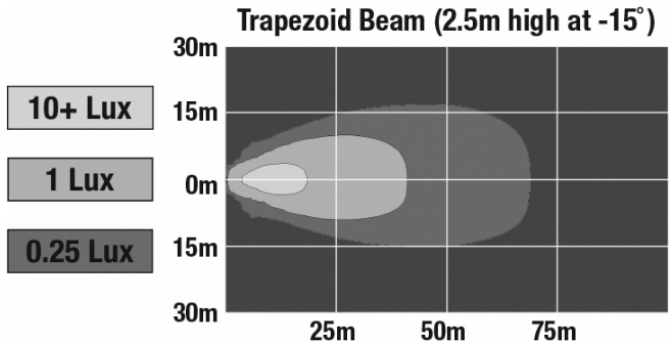

APPLICATIONS



Print date: 2017-09-26

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

