# Model 774 L Work Light

## PRODUCT INFORMATION

**Description** 12-48V LED RHT Work Light with Spot &

Turn Pattern - Bulk Qty (24 MIN)

 Height
 99.82 mm / 3.93 in

 Width
 144.02 mm / 5.67 in

 Depth
 56.90 mm / 2.24 in

**Shape** Oval

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Mounting Hardware 5/16"-18 x 1"

**Description** 

**Mounting Type** Bottom Mount Bracket

**Minimum Operating**  $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$ 

**Temperature** 

**Maximum Operating**  $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$ 

**Temperature** 

**Product Weight** 0.54 lbs / 0.24 kgs **Shipping Weight** 14.45 lbs / 6.55 kgs





# Model 774 L Work Light

## **ELECTRICAL SPECIFICATIONS**

Input Voltage12-48V DCOperating Voltage9-60V DC

**Transient Spike Protection** 330V Peak @ 1 HZ-100 Pulses

Black Wire Ground
White Wire Work Light
Red Wire Park
Yellow Wire Turn

Current Draw .77A @ 12V DC (Work)

.40A @ 24V DC (Work) .26A @ 36V DC (Work) .20A @ 48V DC (Work) .45A @ 12V DC (Turn) .24A @ 24V DC (Turn) .17A @ 36V DC (Turn) .14A @ 48V DC (Turn)

#### REGULATORY STANDARDS COMPLIANCE






Buy America Standards Eco Friendly


#### PHOTOMETRIC SPECIFICATIONS

**Raw Lumen Output** 660 **Effective Lumen** 440

Output

**Beam Pattern(s)** Signalization - Turn (Front)

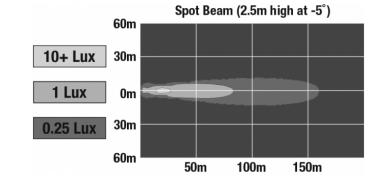





# Model 774 L Work Light

# **APPLICATIONS**





















#### **PRODUCT WARNINGS**

For California residents:

▲ **WARNING:** Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

## **RELATED PRODUCTS**



1706752 12-48V LED LHT Work Light with Spot & Turn Pattern - Bulk Qty (24 MIN)

