#### PRODUCT INFORMATION

**Description** 12-48V LED Work Light with Vertical

Flood Beam Pattern & Mounting Bracket

- Bulk Qty (18 MIN)

 Height
 54.10 mm / 2.13 in

 Width
 169.67 mm / 6.68 in

 Depth
 45.21 mm / 1.78 in

Shape Rectangle
Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

**Mounting Hardware** (x1) M8-1.25 x 25 mm Mounting Bolt

Description

**Mounting Type** Universal Mount **Minimum Operating** -40 °C / -40 °F

**Temperature** 

**Maximum Operating** 65 °C / 149 °F


**Temperature** 

Connector or WiringIntegral DT04-2PMating ConnectorDeutsch DT06-2SProduct Weight0.71 lbs / 0.32 kgsShipping Weight14.00 lbs / 6.35 kgs





#### **PRODUCT DIMENSIONS**

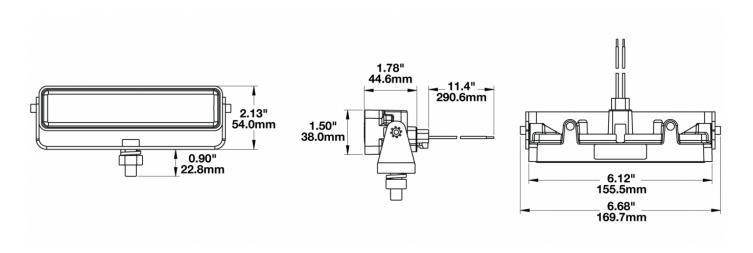

#### **ELECTRICAL SPECIFICATIONS**

Input Voltage12-48V DCOperating Voltage9-60V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

Red Wire Bullet
Black Wire Socket

Current Draw 1.00A @ 12V DC (Flood)

0.50A @ 24V DC (Flood) 0.30A @ 36V DC (Flood) 0.25A @ 48V DC (Flood)

### **REGULATORY STANDARDS COMPLIANCE**







Buy America Standards IEC IP67

Eco Friendly
UL Recognized

Print date: 2024-04-25

6660



#### **PHOTOMETRIC SPECIFICATIONS**


**Raw Lumen Output** 675 **Effective Lumen** 485

Output

**Candela Output** 1,409 **Nominal LED Color** 5000 K

Temperature

**Beam Pattern(s)** Forward Lighting - Flood (Vertical)

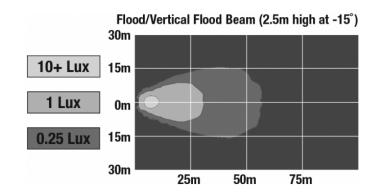

## **APPLICATIONS**























## **PRODUCT WARNINGS**

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

**AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

## **RELATED PRODUCTS**



# **Part Number** 1603391

12-48V LED Work Light 12-48V LED Work Light with Flood Beam Pattern & Mounting **Bracket** 



## **Part Number** 1603451

with Vertical Flood Beam Pattern & Mounting Bracket

