# LED Work Light - Model 783 XD

### PRODUCT INFORMATION

**Description** 12-48V LED Work Light with Flood Beam

Pattern & No Mounting Bracket - Bulk

Qty (18 MIN)

 Height
 54.10 mm / 2.13 in

 Width
 169.67 mm / 6.68 in

 Depth
 45.21 mm / 1.78 in

**Shape** Rectangle **Outer Lens Material** Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

**Minimum Operating**  $-40~^{\circ}\text{C} \ / \ -40~^{\circ}\text{F}$ 

**Temperature** 


**Maximum Operating**  $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$ 


**Temperature** 

Connector or WiringIntegral DT04-2PMating ConnectorDeutsch DT06-2SProduct Weight0.35 lbs / 0.16 kgs



#### **PRODUCT DIMENSIONS**

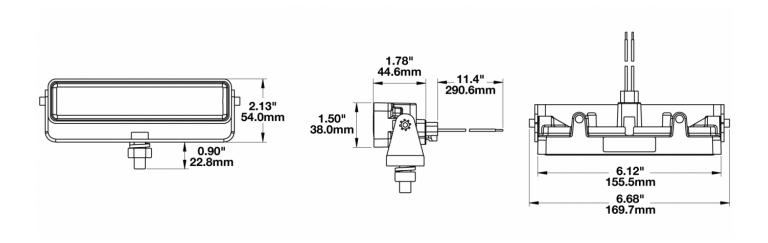



## LED Work Light - Model 783 XD

### **ELECTRICAL SPECIFICATIONS**

Input Voltage12-48V DCOperating Voltage9-60V DC

**Transient Spike Protection** 330V Peak @ 1 HZ-100 Pulses

Red Wire Positive Black Wire Negative

**Current Draw** 1.00A @ 12V DC (Flood)

0.50A @ 24V DC (Flood) 0.30A @ 36V DC (Flood) 0.25A @ 48V DC (Flood)

#### **REGULATORY STANDARDS COMPLIANCE**







Buy America Standards Eco Friendly
IEC IP67 UL Recognized

### PHOTOMETRIC SPECIFICATIONS

**Raw Lumen Output** 675 **Effective Lumen** 485


**Output** 

Candela Output 1,409 Nominal LED Color 5000 K

**Temperature** 

**Beam Pattern(s)** Forward Lighting - Flood

(Standard)

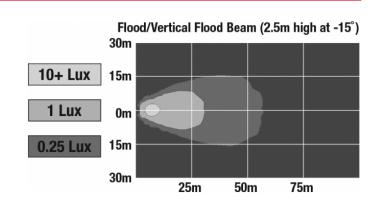



# LED Work Light - Model 783 XD

## **APPLICATIONS**























#### **PRODUCT WARNINGS**

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

### **RELATED PRODUCTS**



**Part Number** 

Bracket

1603391 with Flood Beam Pattern & Mounting



**Part Number** 

1603451 12-48V LED Work Light 12-48V LED Work Light with Vertical Flood Beam Pattern & Mounting Bracket

