

# LED Work Light - Model 6040

## PRODUCT INFORMATION

|                                      |   |
|--------------------------------------|---|
| <b>Description</b>                   | 12V LED Work Light with Polycarbonate Lens & Trapezoid Beam Pattern |
| <b>Height</b>                        | 113.03 mm / 4.45 in   |
| <b>Width</b>                         | 113.03 mm / 4.45 in   |
| <b>Depth</b>                         | 43.18 mm / 1.7 in   |
| <b>Shape</b>                         | Round   |
| <b>Outer Lens Material</b>           | Polycarbonate   |
| <b>Outer Lens Color</b>              | Clear   |
| <b>Housing Material</b>              | Die-Cast Aluminum   |
| <b>Housing Color</b>                 | Black   |
| <b>Retrofits</b>                     | PAR36 Worklights  |
| <b>Minimum Operating Temperature</b> | -40 °C / -40 °F   |
| <b>Maximum Operating Temperature</b> | 65 °C / 149 °F  |
| <b>Connector or Wiring</b>           | Blade Terminals (Ring Terminal Adaptors Provided)                   |
| <b>Mating Connector</b>              | 0.25" Blade, #6 Ring Terminal, #8 Ring Terminal                     |
| <b>Product Weight</b>                | 0.69 lbs / 0.31 kgs   |
| <b>Shipping Weight</b>               | 1.84 lbs / 0.83 kgs   |



Print date: 2018-02-19

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**®  
 Engineered. Lighting. Solutions.

# LED Work Light - Model 6040

## PRODUCT DIMENSIONS



## ELECTRICAL SPECIFICATIONS

|                                   |                             |
|-----------------------------------|-----------------------------|
| <b>Input Voltage</b>              | 12V DC                      |
| <b>Operating Voltage</b>          | 10-15V DC                   |
| <b>Transient Spike Protection</b> | 150V Peak @ 1 HZ-100 Pulses |
| <b>Red Wire</b>                   | Positive                    |
| <b>Black Wire</b>                 | Negative                    |
| <b>Current Draw</b>               | 2.00 MaxA @ 12V DC          |

## REGULATORY STANDARDS COMPLIANCE



Buy America Standards  
IEC IP66

Eco Friendly

Print date: 2018-02-19


© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
Engineered. Lighting. Solutions.

# LED Work Light - Model 6040

## PHOTOMETRIC SPECIFICATIONS

**Raw Lumen Output** 1,050  
**Effective Lumen Output** 770  
**Nominal LED Color Temperature** 5000 K  
**Beam Pattern(s)** Forward Lighting - Trapezoid

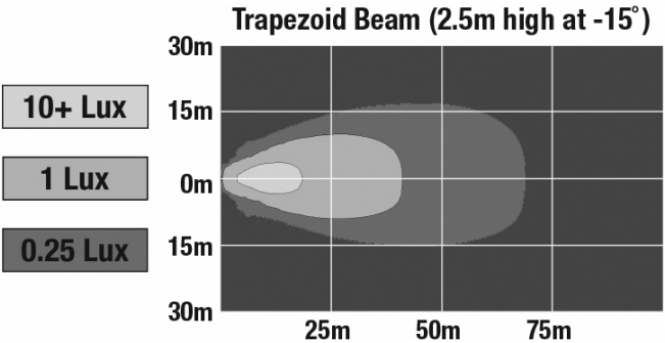

## APPLICATIONS



Print date: 2018-02-19

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



# LED Work Light - Model 6040

## RELATED PRODUCTS

---



**Part Number**  
**3157291**

12V LED Work Light  
with Glass Lens &  
Flood Beam Pattern



**Part Number**  
**3157301**

12V LED Work Light  
with Glass Lens &  
Trapezoid Beam  
Pattern



**Part Number**  
**3157471**

12-48V LED Work Light  
with Polycarbonate  
Lens & Flood Beam  
Pattern



**Part Number**  
**3157481**

12-48V LED Work Light  
with Polycarbonate  
Lens & Trapezoid  
Beam Pattern



**Part Number**  
**3157491**

12-48V LED Work Light  
with Polycarbonate  
Lens & Spot Beam  
Pattern



**Part Number**  
**3157581**

12-48V LED Work Light  
with Glass Lens & Spot  
Beam Pattern



**Part Number**  
**3157591**

12-48V LED Work Light  
with Glass Lens &  
Trapezoid Beam  
Pattern



**Part Number**  
**3157601**

12-48V LED Work Light  
with Glass Lens &  
Flood Beam Pattern