


LED Work Light - Model 660

PRODUCT INFORMATION

| | |
|--------------------------------------|--|
| Description | 12-24V LED Work Light with Flood Beam Pattern & Pedestal Mount |
| Height | 121.92 mm / 4.8 in |
| Width | 169.93 mm / 6.69 in |
| Depth | 81.53 mm / 3.21 in |
| Shape | Oval |
| Outer Lens Material | Glass |
| Outer Lens Color | Clear |
| Housing Material | Die-Cast Aluminum |
| Housing Color | Black |
| Mounting Hardware Description | (x1) M8-1.25 x 20mm Mounting Bolt |
| Mounting Type | Universal Pedestal Mount |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Mating Connector | Packard (#12059183) |
| Product Weight | 1.45 lbs / 0.66 kgs |
| Shipping Weight | 2.69 lbs / 1.22 kgs |



PRODUCT DIMENSIONS

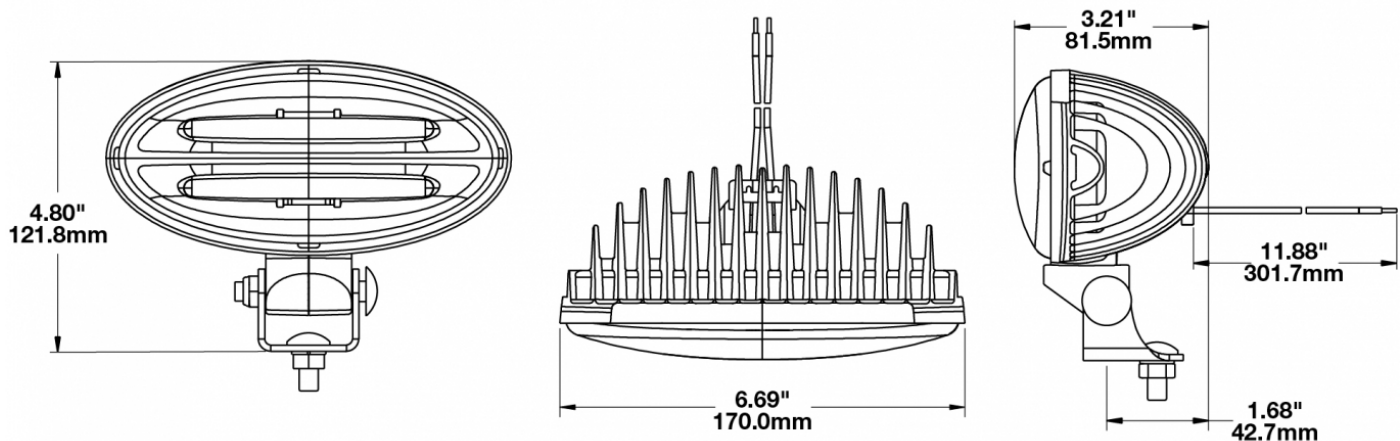

Print date: 2018-03-21

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Work Light - Model 660

ELECTRICAL SPECIFICATIONS

| | |
|-----------------------------------|--------------------------------|
| Input Voltage | 12-24V DC |
| Operating Voltage | 9-28V DC |
| Transient Spike Protection | 150V Peak @ 1 HZ-100 Pulses |
| Red Wire | Positive |
| Black Wire | Negative |
| Current Draw | 2.0A @ 12V DC 1.0A @ 24V DC |

REGULATORY STANDARDS COMPLIANCE




Buy America Standards
IEC IP69K

Eco Friendly

PHOTOMETRIC SPECIFICATIONS

| | |
|--------------------------------------|-------------------------------------|
| Raw Lumen Output | 2,750 |
| Effective Lumen Output | 2,200 |
| Nominal LED Color Temperature | 5000 K |
| Beam Pattern(s) | Forward Lighting - Flood (Standard) |

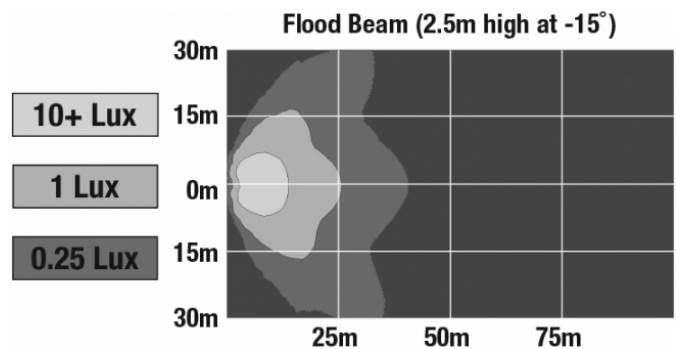

Print date: 2018-03-21

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Work Light - Model 660

APPLICATIONS



RELATED PRODUCTS



Part Number

0548521

12-24V LED Work Light
with Flood Beam
Pattern & Panel Mount