


# LED Work Light - Model 660

## PRODUCT INFORMATION

|                                      |   |
|--------------------------------------|---|
| <b>Description</b>                   | 12-24V LED Work Light with Flood Beam Pattern & Panel Mount |
| <b>Height</b>                        | 106.68 mm / 4.2 in  |
| <b>Width</b>                         | 189.99 mm / 7.48 in   |
| <b>Depth</b>                         | 73.66 mm / 2.9 in   |
| <b>Shape</b>                         | Oval  |
| <b>Outer Lens Material</b>           | Glass   |
| <b>Outer Lens Color</b>              | Clear   |
| <b>Housing Material</b>              | Die-Cast Aluminum   |
| <b>Housing Color</b>                 | Black   |
| <b>Mounting Type</b>                 | Panel Mount   |
| <b>Minimum Operating Temperature</b> | -40 °C / -40 °F   |
| <b>Maximum Operating Temperature</b> | 65 °C / 149 °F  |
| <b>Mating Connector</b>              | Packard (#12059183)   |
| <b>Product Weight</b>                | 1.41 lbs / 0.64 kgs   |
| <b>Shipping Weight</b>               | 2.57 lbs / 1.17 kgs   |



## PRODUCT DIMENSIONS

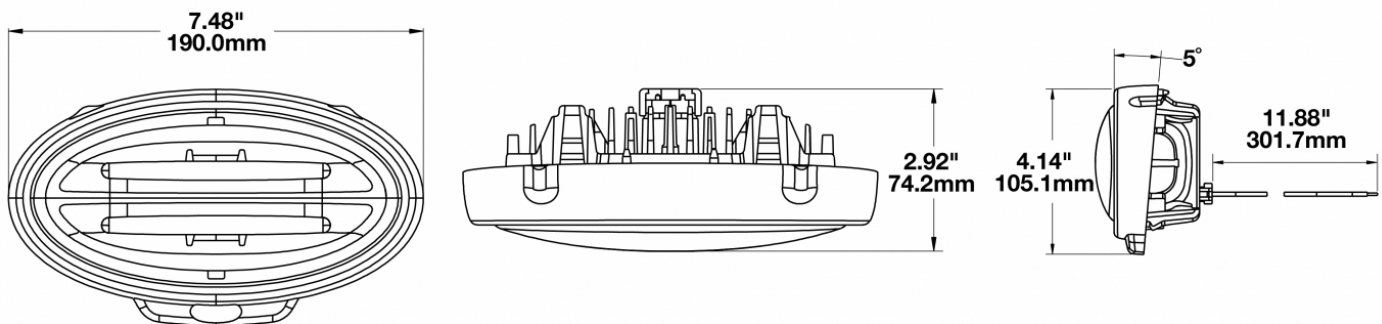

Print date: 2018-11-20

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# LED Work Light - Model 660

## ELECTRICAL SPECIFICATIONS

|                                   |                                |
|-----------------------------------|--------------------------------|
| <b>Input Voltage</b>              | 12-24V DC                      |
| <b>Operating Voltage</b>          | 9-28V DC                       |
| <b>Transient Spike Protection</b> | 150V Peak @ 1 HZ-100 Pulses    |
| <b>Red Wire</b>                   | Positive                       |
| <b>Black Wire</b>                 | Negative                       |
| <b>Current Draw</b>               | 2.0A @ 12V DC<br>1.0A @ 24V DC |

## REGULATORY STANDARDS COMPLIANCE




Buy America Standards  
IEC IP69K

Eco Friendly

## PHOTOMETRIC SPECIFICATIONS

|                                      |                                     |
|--------------------------------------|-------------------------------------|
| <b>Raw Lumen Output</b>              | 2,750                               |
| <b>Effective Lumen Output</b>        | 2,200                               |
| <b>Nominal LED Color Temperature</b> | 5000 K                              |
| <b>Beam Pattern(s)</b>               | Forward Lighting - Flood (Standard) |

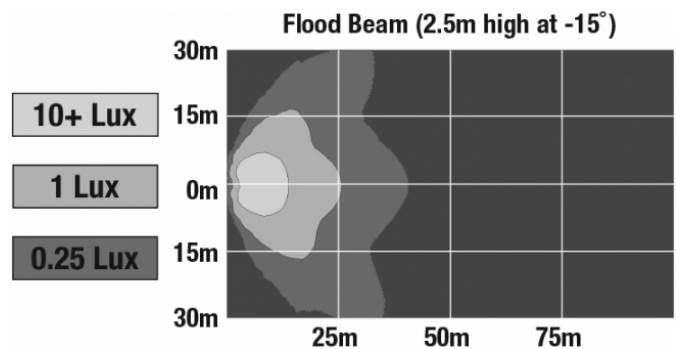

Print date: 2018-11-20

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Work Light - Model 660

## APPLICATIONS

---



## RELATED PRODUCTS

---



**Part Number**

**0548511**

12-24V LED Work Light  
with Flood Beam  
Pattern & Pedestal  
Mount