PRODUCT INFORMATION

Description

Height Width Depth Shape **Outer Lens Material Outer Lens Color Housing Material Housing Color Mounting Hardware** Description **Mounting Type Minimum Operating** Temperature **Maximum Operating** Temperature **Connector or Wiring Mating Connector Product Weight Shipping Weight**

12-24V LED Heated Work Light with Flood Beam Pattern 162.31 mm / 6.39 in 123.95 mm / 4.88 in 52.58 mm / 2.07 in Round Polycarbonate Clear Polycarbonate Black 5/16-18 x 1" Mounting Bolt Universal Pedestal Mount -40 °C / -40 °F

65 °C / 149 °F

Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P) 2-Pin Deutsch Weather-Proof Plug (DT06-2S) 1.41 lbs / 0.64 kgs 1.41 lbs / 0.64 kgs










PRODUCT DIMENSIONS

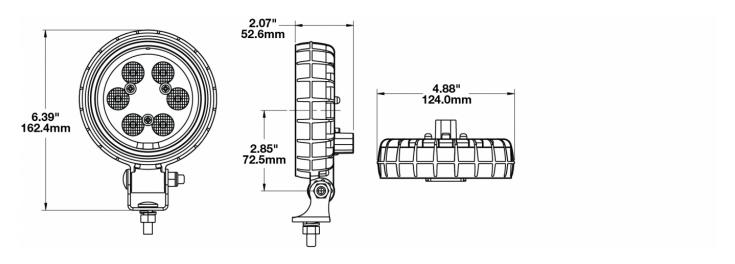

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	10-30V DC
Red Wire	Positive
Black Wire	Negative
Current Draw	1.3A @ 12V DC (Without Heat) 0.6A @ 24V DC (Without Heat) 2.1A @ 12V DC (With Heat) 1.1A @ 24V DC (With Heat)

REGULATORY STANDARDS COMPLIANCE



IEC IP67 SAE J1113-13

IEC IP69K Tested to ECE Reg. 10 (Radiated Emissions only)

Print date: 2024-04-25 © 2024 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	1,080
Effective Lumen Output	780
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - Flood (Standard)

APPLICATIONS



SMARTHEAT[™] HEATING SYSTEM

The SmartHeat[™] heating system senses ambient temperature and turns the integrated heating system in the lens on & off. This system actually clears ice & snow twice as fast as conventional halogen lamps.

When does the heater turn on?

Heater turns on or off according to temperature changes and vehicle power:

- Heater will turn on when temperatures drop, generating enough heat to prevent ice build-up.
- Heater will turn on when powering up, de-icing the light as rapidly as possible.

When does the heater turn off?

Heater will turn off when it senses temperatures increase and are above the high temperature threshold.

Learn more about this technology here.



LED Heated and Non Heated Work Lights - Model 670 XD PRODUCT WARNINGS

For California residents:

WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.

ACCESSORIES






Part Number 8200101 Stainless Steel Mounting Kit for Work Lights & Marine Lights

Part Number 8200011 Magnet Mount Kit for XD Series Work Lights



Part Number 8200491 Mounting Kit For Work Lights





RELATED PRODUCTS



Part Number 1403241 12-24V Non-Heated LED Work Light with Flood Beam Pattern



Part Number 1403251 12-24V Non-Heated LED Work Light with Trapezoid Beam Pattern



Part Number 1403261 12-24V Non-Heated LED Work Light with Spot Beam Pattern



Part Number 1403271 12-110V Non-Heated LED Work Light with Trapezoid Beam Pattern



Part Number 1403281 12-110V Non-Heated LED Work Light with Spot Beam Pattern



Part Number 1403291 12-110V Non-Heated LED Work Light with Flood Beam Pattern



Part Number 1403481 12-24V LED Heated Work Light with Spot Beam Pattern



Part Number 1403491 12-24V LED Heated Amber Work Light with Flood Beam Pattern

