
LED Work Light - Model 806

PRODUCT INFORMATION

Description	12V LED Work Light with Flood Beam Pattern & Bottom Mount
Height	124.71 mm / 4.91 in
Width	143.26 mm / 5.64 in
Depth	60.45 mm / 2.38 in
Shape	Rectangular
Outer Lens Material	Glass
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Type	Bottom Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Mating Connector	Packard (#12020599)
Product Weight	1.95 lbs / 0.88 kgs
Shipping Weight	33.00 lbs / 14.97 kgs



PRODUCT DIMENSIONS

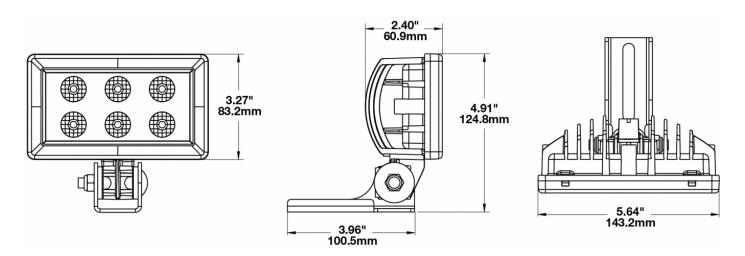



LED Work Light - Model 806

ELECTRICAL SPECIFICATIONS


Input Voltage	12V DC
Operating Voltage	9-16V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Black Wire	Negative
Current Draw	1.5A @ 12V DC

REGULATORY STANDARDS COMPLIANCE



Buy America Standards IEC IP67 Tested to ECE Reg. 10 (Radiated Emissions only) Eco Friendly SAE J1113-21

PHOTOMETRIC SPECIFICATIONS

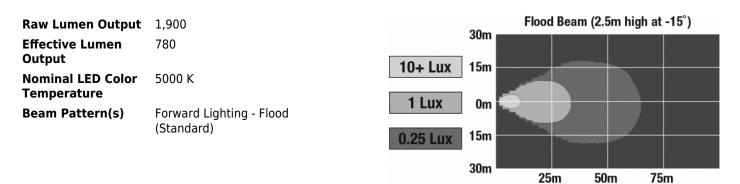



LED Work Light - Model 806

APPLICATIONS



PRODUCT WARNINGS

For California residents:

WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.

RELATED PRODUCTS



Part Number 0545961 12V LED Work Light with Flood Beam Pattern & Fender Mount



Part Number 0545981 12V LED Work Light with Flood Beam Pattern & Side Mount



Part Number 0547431 12V LED Work Light with Flood Beam Pattern & Combine Retrofit Mount



Part Number 0548311 12V LED Work Light with Flood Beam Pattern & 10 degree Mounting Plate



