

LED Work Light - Model 806

PRODUCT INFORMATION

Description	12V LED Work Light with Flood Beam Pattern & 10 degree Mounting Plate
Height	133.35 mm / 5.25 in
Width	250.70 mm / 9.87 in
Depth	59.94 mm / 2.36 in
Shape	Rectangular
Outer Lens Material	Glass
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Type	10° Mounting Plate
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Mating Connector	Packard (#12020599)
Shipping Weight	2.60 lbs / 1.18 kgs



ELECTRICAL SPECIFICATIONS

Input Voltage	12V DC
Operating Voltage	9-16V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Black Wire	Negative
Current Draw	1.5A @ 12V DC

Print date: 2018-05-20

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Work Light - Model 806

REGULATORY STANDARDS COMPLIANCE




Buy America Standards
IEC IP67

Eco Friendly
SAE J1113-21


Tested to ECE Reg. 10
(Radiated Emissions only)

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 1,100
Effective Lumen Output 900
Nominal LED Color Temperature 5000 K
Beam Pattern(s) Forward Lighting - Flood (Standard)

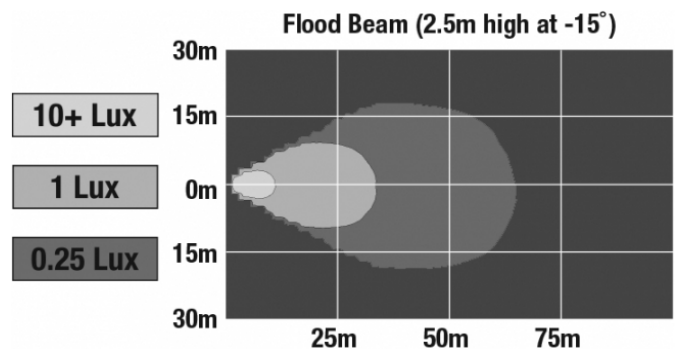

APPLICATIONS

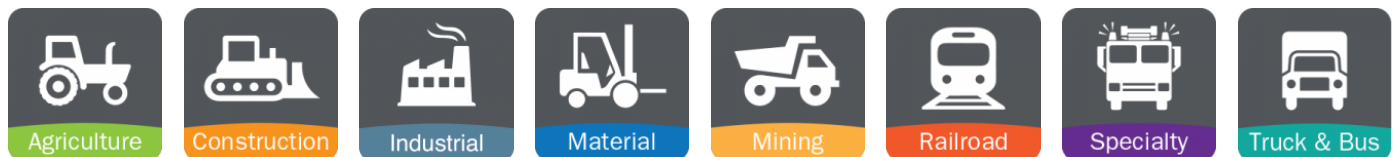

Print date: 2018-05-20

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Work Light - Model 806

RELATED PRODUCTS



Part Number
0545961
12V LED Work Light
with Flood Beam
Pattern & Fender
Mount



Part Number
0545971
12V LED Work Light
with Flood Beam
Pattern & Bottom
Mount



Part Number
0545981
12V LED Work Light
with Flood Beam
Pattern & Side Mount



Part Number
0547431
12V LED Work Light
with Flood Beam
Pattern & Combine
Retrofit Mount