

## LED Material Handling Safety Lights - Model


## 770 RED

## PRODUCT INFORMATION

|                                      |                                   |
|--------------------------------------|-----------------------------------|
| <b>Description</b>                   | 12-110V LED Red Safety Spot Light |
| <b>Height</b>                        | 137.16 mm / 5.4 in                |
| <b>Width</b>                         | 144.27 mm / 5.68 in               |
| <b>Depth</b>                         | 87.88 mm / 3.46 in                |
| <b>Shape</b>                         | Oval                              |
| <b>Outer Lens Material</b>           | Polycarbonate                     |
| <b>Outer Lens Color</b>              | Clear                             |
| <b>Housing Material</b>              | Polycarbonate                     |
| <b>Housing Color</b>                 | Black                             |
| <b>Mounting Hardware Description</b> | (x1) M10-1.5 x 25mm               |
| <b>Mounting Type</b>                 | Universal Pedestal Mount          |
| <b>Minimum Operating Temperature</b> | -40 °C / -40 °F                   |
| <b>Maximum Operating Temperature</b> | 65 °C / 149 °F                    |
| <b>Connector or Wiring</b>           | Integrated                        |
| <b>Mating Connector</b>              | AMP (#180923)                     |
| <b>Product Weight</b>                | 1.31 lbs / 0.59 kgs               |
| <b>Shipping Weight</b>               | 1.31 lbs / 0.59 kgs               |



## PRODUCT DIMENSIONS

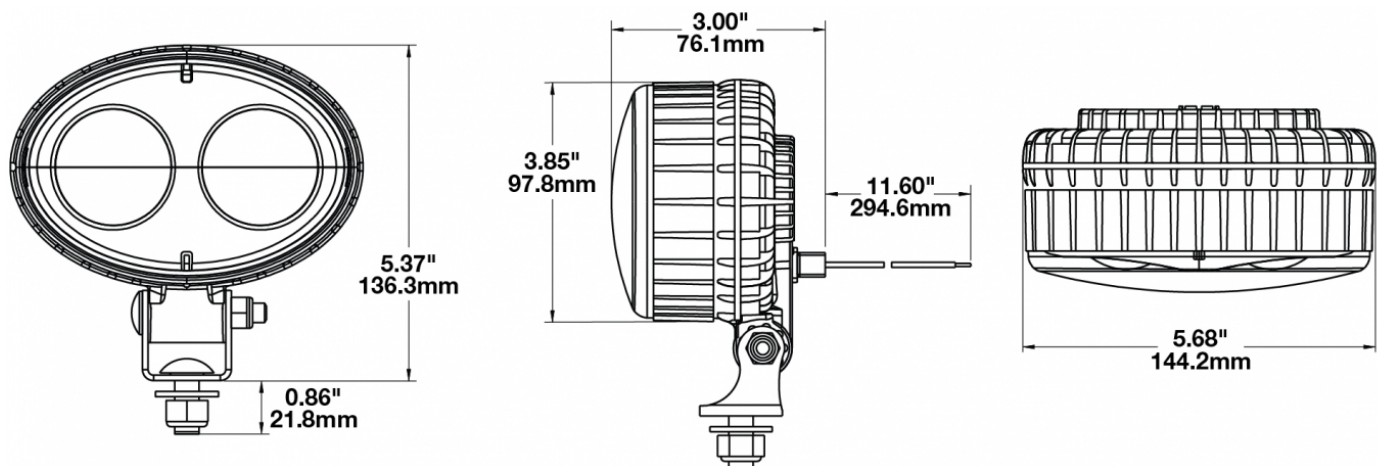

Print date: 2017-10-23

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# LED Material Handling Safety Lights - Model 770 RED

## ELECTRICAL SPECIFICATIONS

---

|                          |   |
|--------------------------|---|
| <b>Input Voltage</b>     | 12-110V DC  |
| <b>Operating Voltage</b> | 9-120V DC   |
| <b>Red Wire</b>          | Positive  |
| <b>Black Wire</b>        | Negative  |
| <b>Current Draw</b>      | 0.19A @ 12V DC<br>0.05A @ 60V DC<br>0.04A @ 110V DC |

## REGULATORY STANDARDS COMPLIANCE

---



Buy America Standards  
IEC IP69K  
Tested to ECE Reg. 10  
(Radiated Emissions only)

Eco Friendly  
SAE J1455  
UL Recognized

## PHOTOMETRIC SPECIFICATIONS

---

|                                      |                         |
|--------------------------------------|-------------------------|
| <b>Nominal LED Color Temperature</b> | 5000 K                  |
| <b>Beam Pattern(s)</b>               | Forward Lighting - Spot |

## APPLICATIONS

---



Print date: 2017-10-23

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660