

# 12V DOT/ECE LED High & Low Beam Headlight w Black Inner Bezel - Pre-assembled 2 Light Kit

## PRODUCT INFORMATION

<b>Description</b>	12V DOT/ECE LED High & Low Beam Headlight w Black Inner Bezel - Pre-assembled 2 Light Kit
<b>Height</b>	143.00 mm / 5.63 in
<b>Width</b>	143.00 mm / 5.63 in
<b>Depth</b>	82.50 mm / 3.25 in
<b>Shape</b>	Round
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Bezel Color</b>	Black
<b>Mounting Hardware Description</b>	(x1) Stainless steel brackets and bolts
<b>Retrofits</b>	HD Road Glide (2014 and older)
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Connector or Wiring</b>	H4
<b>Mating Connector</b>	H4, AMP#172615-2
<b>Product Weight</b>	5.00 lbs / 2.27 kgs
<b>Shipping Weight</b>	6.45 lbs / 2.93 kgs




Print date: 2018-04-19

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**   
Engineered. Lighting. Solutions.

# 12V DOT/ECE LED High & Low Beam Headlight w Black Inner Bezel - Pre-assembled 2 Light Kit

## PRODUCT DIMENSIONS

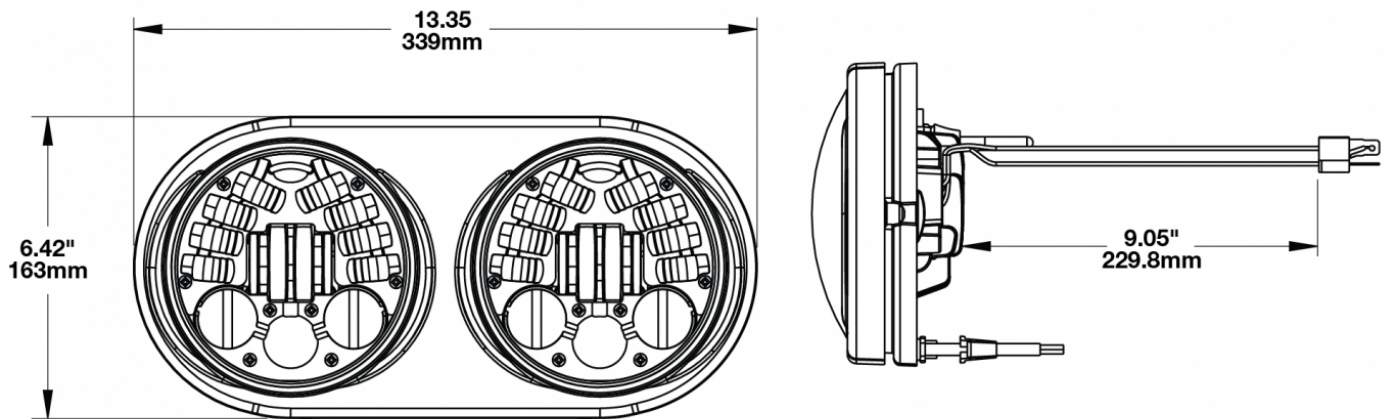

## ELECTRICAL SPECIFICATIONS


<b>Input Voltage</b>	12V DC
<b>Operating Voltage</b>	9-16V DC
<b>Black Wire</b>	Ground
<b>White Wire</b>	High Beam
<b>Yellow Wire</b>	Low Beam
<b>Red Wire</b>	Front Position
<b>Current Draw</b>	3.80A @ 12V DC (Low Beam)
	6.40A @ 12V DC (High Beam)
	0.42A @ 12V DC (Front Position)
	8.40A @ 12V DC (Low Beam at Full Lean)

Print date: 2018-04-19

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# 12V DOT/ECE LED High & Low Beam Headlight w Black Inner Bezel - Pre-assembled 2 Light Kit


## REGULATORY STANDARDS COMPLIANCE

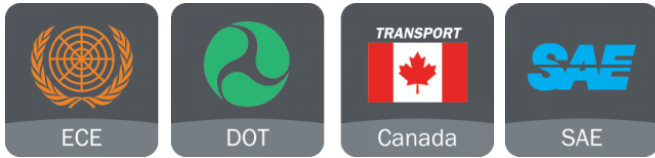

ECE Reg 113	ECE Reg 50
FMVSS 108 Table XX	IEC IP67
SAE J575	SAE J584

## PHOTOMETRIC SPECIFICATIONS

<b>Raw Lumen Output</b>	7,020 (High Beam); 4,240 (Low Beam)
<b>Effective Lumen Output</b>	3,200 (High Beam); 2,040 (Low Beam)
<b>Nominal LED Color Temperature</b>	5000 K
<b>Beam Pattern(s)</b>	Forward Lighting - High Beam (DOT/ECE) Forward Lighting - Low Beam (DOT/ECE) Signalization - Front Position

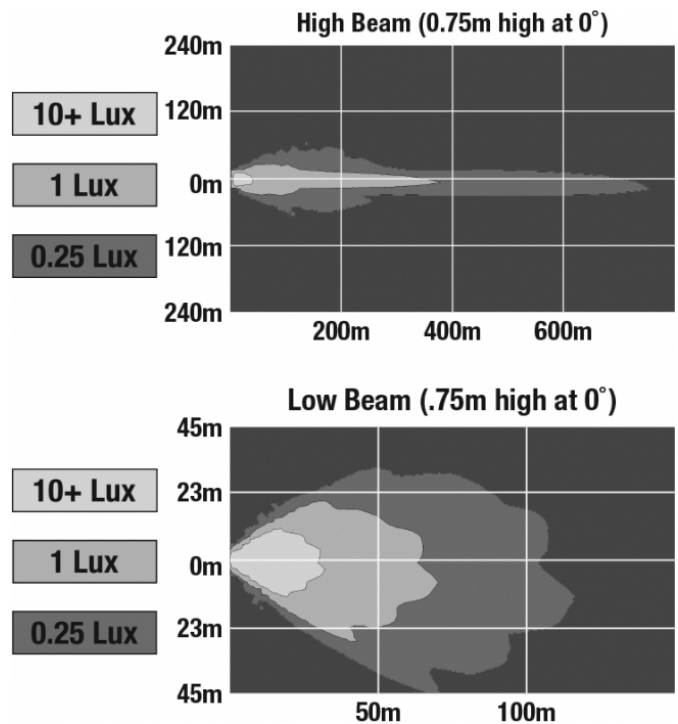

Print date: 2018-04-19

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# 12V DOT/ECE LED High & Low Beam Headlight w Black Inner Bezel - Pre-assembled 2 Light Kit

## APPLICATIONS

---



## INSTALLATION & APPLICATION INFORMATION

---

The headlights are designed to operate in a 2 lamp array. It requires 2 lamps to meet the legal requirements for both the high and low beams.

Headlight must be securely mounted and properly aimed such that the beam pattern cut off line complies with all applicable regulations. If you are not familiar with the legal requirements for aiming your headlights, please see a professional service provider. We recommend that headlights are aimed with a headlight aiming system for proper alignment.

## ADDITIONAL INFORMATION

---

Note about Front Position: The front position light is a requirement outside the United States. **If your bike is operated in the United States you do NOT need to connect this wire (red)** unless your bike is equipped with a front position light.

## SUITS THESE PRODUCTS

---

### NON-ADAPTIVE



### Road Glide® 5.75"

### Dual Headlights

Motorcycle LED  
Headlights - Model  
8692

---

Print date: 2018-04-19

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER®**  
Engineered. Lighting. Solutions.