

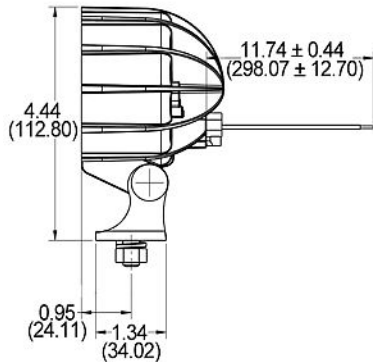


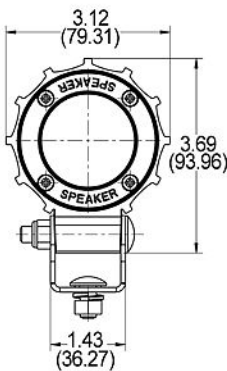

Model 4410 LED Work Light (3/4 Front View)



Dimensions in inches (mm in parentheses).  
Dimensions are for reference only.

### Product List

Model Number	Description
4410-12/48V	12-48V LED Work Light

### Features & Benefits

- 1,100 Raw Lumens; 525 Effective Lumens
- Available in a 12-48V DC configuration
- Flood or spot beam patterns available
- UV-resistant polycarbonate lens
- Rugged solid state LEDs can withstand shock & vibration
- Long-lasting LEDs mean never having to replace another bulb again!
- Die-cast aluminum housing provides maximum protection
- Universal mount

### General Specifications

<b>Lens Pattern :</b>	Flood or Spot
<b>Lens Material :</b>	Polycarbonate
<b>Warranty:</b>	4-year Limited Warranty
<b>Housing Material :</b>	Die-Cast Aluminum
<b>Mounting :</b>	Universal Mount
<b>Connector:</b>	Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P)
<b>Mating Connector:</b>	2-Pin Deutsch Weather-Proof Plug (DT06-2S)
<b>Weight:</b>	1.00 lbs.
<b>Shipping Weight:</b>	1.25 lbs.

### Technical Specifications

<b>4410-12/48V</b>
12-48V DC Input
1.00 Amps @ 12V DC
0.50 Amps @ 24V DC
0.33 Amps @ 36V DC
0.25 Amps @ 48V DC
Raw Lumen Output: 1,100
Effective Lumen Output: 525

### Standards Compliance

Sealed to IP67

### Applications

Agricultural	Construction	Fire & Rescue
Forestry	Industrial	Law Enforcement
Lawn & Garden	Military	Mining
Off-Highway	Recreational	Specialty Trucks
Utility		

# Model 4410

