



### Product List

Model Number	Description
783-12/48V	12-48V LED Work Light

### Features & Benefits

- 600 Raw Lumens, 430 Effective Lumens
- Available in a 12-48V DC configuration
- Flood & Vertical Flood beam patterns available
- UV-resistant polycarbonate lens
- Rugged solid state LEDs can withstand shock & vibration
- Long-lasting LEDs mean never having to replace another bulb again!
- Die-cast aluminum housing provides maximum protection
- Universal mount

### General Specifications

<b>Lens Pattern :</b>	Flood or Vertical Flood
<b>Lens Material :</b>	Polycarbonate
<b>Warranty:</b>	4-year Limited Warranty
<b>Housing Material :</b>	Die-Cast Aluminum
<b>Mounting Hardware:</b>	(x1) 3/8-16 x 1.00 Mounting Bolt
<b>Mounting :</b>	Universal Mount
<b>Connector:</b>	Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P)
<b>Mating Connector:</b>	2-Pin Deutsch Weather-Proof Plug (DT06-2S)

### Technical Specifications



**783-12/48V**  
 12-48V DC Input  
 1.00 Amps @ 12V DC  
 0.550 Amps @ 24V DC  
 0.380 Amps @ 36V DC  
 0.250 Amps @ 48V DC  
 Raw Lumen Output: 600  
 Effective Lumen Output: 430

### Standards Compliance

SAE J575	SAE J1113
SAE J1455	CE Recognized
ETL Conformance to UL 583	UL Recognized
Sealed to IP67	

### Applications

Agricultural	Construction	Forestry
Industrial	Material Handling	Military
Mining	Off-Highway	Recreational
Specialty Trucks	Utility	

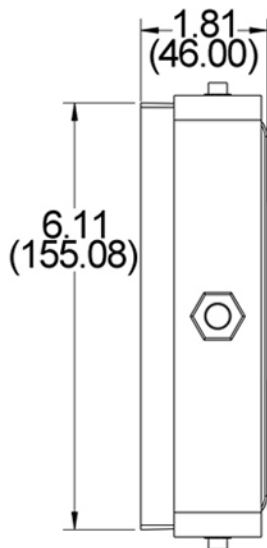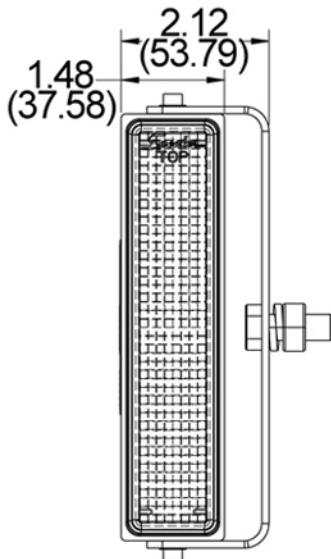

Dimensions in inches (mm in parentheses).  
 Dimensions are for reference only.

# Model 783

