
Model 90 High Beam Version

90mm LED Headlights



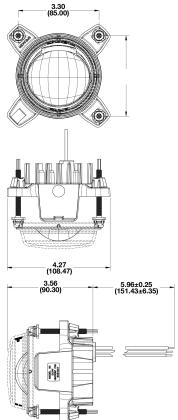

Dimensions in inches (mm in parentheses). Dimensions are for reference only.

Headlights Must be Aimed After Installation!

Headlight must be securely mounted and properly aimed such that the beam pattern "cut off line" complies with all applicable regulations. If you are not familiar with the legal requirements for aiming your headlights, please see a professional service provider. We recommend that headlights are aimed with a headlight aiming system for proper alignment.

The installation of a relay is essential to obtain maximum operating efficiency of all lighting. Relays protect existing switches and wiring to prevent voltage drop that occurs due to inadequate current carrying capacity.

Technical Specifications

High Beam Version w/ Front Position

12-24V DC Input

0.80 Amps (High Beam); 0.40 Amps (Front Position) @ 12V DC 0.40 Amps (High Beam); 0.20 Amps (Front Position) @ 24V DC

10.5-38V DC Operating Voltage

Transient Spike Protection: 150V Peak @ 1 HZ-100 Pulses

Standards Compliance

FMVSS 108* (DOT Compliant) **Buy America Compliant** ECE Reg. 112

CMVSS 108 ECE Reg. 7 (Front Position) Sealed to IP67







*High Beam complies with FMVSS 108 UB6 (DOT Compliant) when operated in conjunction with a low beam

Lamp Identification

High Beam Marks



DOT U VOR SAE HL 12

Mounting & Wiring

The High Beam version must be mounted with the Front Position optic at the top.

Black wire: Ground Red wire: Power

White wire: Front Position

Warranty Policy

All J.W. Speaker Corporation LED products come with a Lifetime Limited Warranty against defects in materials, components and workmanship. This Lifetime Limited Warranty is not transferrable and applies to the original installation of the J.W. Speaker Corporation LED light as long as the original consumer/purchaser owns the vehicle (lifetime). Please note that this warranty does not cover claims resulting from:

- · Abuse, neglect and/or accidents
- · Modifications and/or alterations
- Improper installation and/or use
- · Chemicals and/or cleaners
- Voltage transients and/or spikes

In the unlikely event that you experience a problem that falls within the terms of this Lifetime Limited Warranty, J.W. Speaker Corporation will, at its discretion, either replace or refund the purchase price of the product. To make a warranty claim, simply return the product (along with all of the factory-issued components) to the J.W. Speaker Corporation authorized dealer where the product was originally purchased and complete a warranty claim form.

This product warranty is exclusive. J.W. Speaker Corporation has no other liability or obligation related to products. No other warranties are made, either express or implied, including without limitation, any implied warranties of title, non-infringement, merchantability or fitness for a particular purpose.