



High Beam/Low Beam and Front Position H4 Harness

PRODUCT INFORMATION

Description	High Beam/Low Beam and Front Position H4 Harness
Connector or Wiring	Deutsch DT06-6S

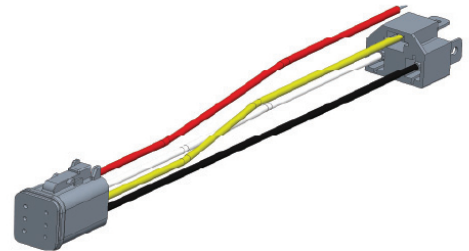

PRODUCT DIMENSIONS

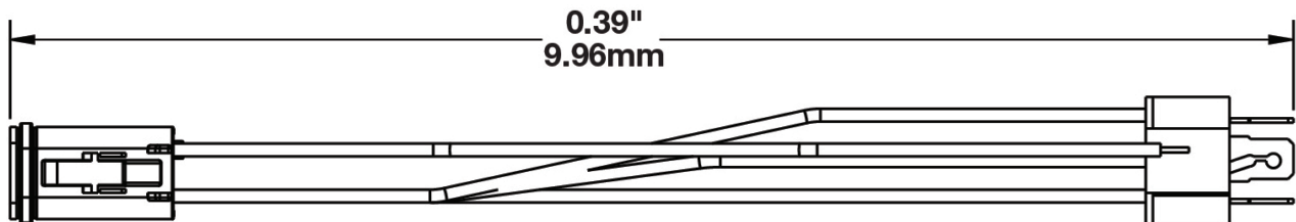

Print date: 2026-05-13

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

High Beam/Low Beam and Front Position H4 Harness

ELECTRICAL SPECIFICATIONS

Red Wire	Front Position
Yellow Wire	Low Beam
White Wire	High Beam
Black Wire	Ground

PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

SUITS THESE PRODUCTS



5.75" LED headlight with 5 in 1 functions, SmartHeat® lens heating, and signature "X" styling.

Model 8600 EVO-X
Headlight



7" LED headlight with 5 in 1 functions, premium visibility, and durable performance for demanding on road use.

Model 8700 EVO-X
Headlight



4"×6" LED headlight delivering daylight level, street legal visibility with 5 in 1 functions for broad on road applications.

Model 8800 EVO-X
Headlight



5"×7" LED headlight with best in class precision beam performance and 5 in 1, street legal forward lighting.

Model 8900 EVO-X
Headlight

Print date: 2026-05-13

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.