

Model 775 L Work Light

PRODUCT INFORMATION

Description	12-48V LED Work Light with Spot Beam & Turn Signal
Height	180.34 mm / 7.1 in
Width	99.57 mm / 3.92 in
Depth	58.42 mm / 2.3 in
Shape	Oval
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Mounting Hardware Description	(x1) 5/16"-18 x 1.00" Mounting Bolt
Mounting Type	Universal Pedestal Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	2-Pin Deutsch Weather-Proof Plug (DT06-2S)
Product Weight	0.85 lbs / 0.39 kgs
Shipping Weight	7.34 lbs / 3.33 kgs



ELECTRICAL SPECIFICATIONS

Input Voltage	12-48V DC
Operating Voltage	9-60V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Black Wire	Ground
White Wire	Worklight
Red Wire	Park
Yellow Wire	Turn
Current Draw	1.2A @ 12V DC 0.6A @ 24V DC 0.4A @ 36V DC 0.3A @ 48V DC

Print date: 2019-12-15

© 2019 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

Model 775 L Work Light


REGULATORY STANDARDS COMPLIANCE



Buy America Standards	CISPR 12
CISPR 22	ECE Reg 6
Eco Friendly	IEC IP67
UL Recognized	

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	600
Effective Lumen Output	400
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - Spot

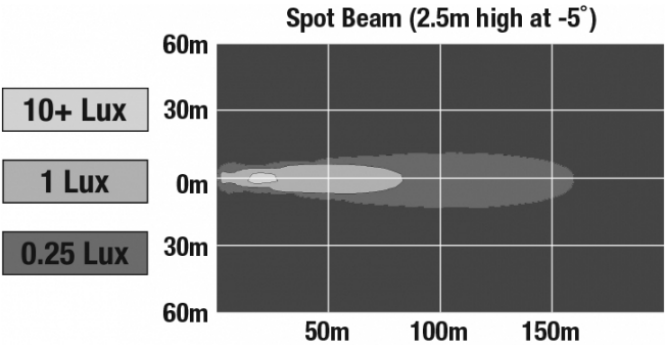

APPLICATIONS



Print date: 2019-12-15

© 2019 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



Model 775 L Work Light

PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2019-12-15

© 2019 J.W. Speaker Corporation • Germantown, WI U.S.A.

www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
Engineered. Lighting. Solutions.