

LED Headlight - Model 8820

PRODUCT INFORMATION

Description	12-24 ECE LED LHT High & Low Beam Headlight with FP & 3 Point Mount
Height	129.79 mm / 5.11 in
Width	168.66 mm / 6.64 in
Depth	87.38 mm / 3.44 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Aluminum
Housing Color	Black
Bezel Color	Black
Mounting Type	3 Point Mount
Connector or Wiring	12" Flying Leads
Mating Connector	n/a
Shipping Weight	2.84 lbs / 1.29 kgs



PRODUCT DIMENSIONS

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	10-30V DC
Black Wire	Ground
White Wire	High Beam
Yellow Wire	Low Beam
Red Wire	Front Position
Current Draw	1.11A @ 12V DC (Low Beam) 0.96A @ 24V DC (Low Beam) 2.14A @ 12V DC (High Beam) 1.56A @ 24V DC (High Beam) 0.056A @ 12V DC (Front Position) 0.065A @ 24V DC (Front Position)

Print date: 2018-05-25

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Headlight - Model 8820

REGULATORY STANDARDS COMPLIANCE



Buy America Standards
 ECE Reg 7
 IEC IP67


ECE Reg 112
 Eco Friendly

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2,100 (High Beam); 1,850 (Low Beam)

Effective Lumen Output 755 (High Beam); 645 (Low Beam)

Beam Pattern(s) Forward Lighting - High Beam (DOT/ECE)
 Forward Lighting - Low Beam (ECE Left Hand)
 Signalization - Front Position

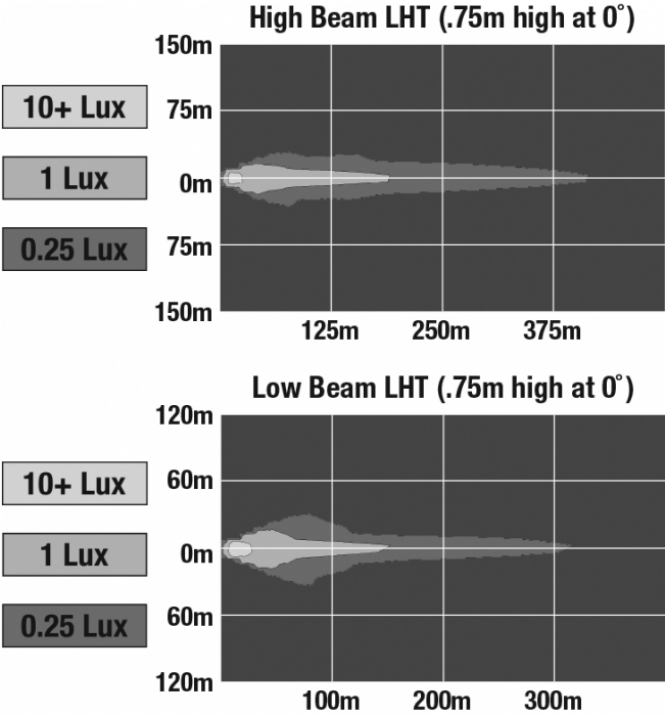

Print date: 2018-05-25

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



LED Headlight - Model 8820

APPLICATIONS



RELATED PRODUCTS



Part Number
0550271

12-24 DOT/ECE LED
RHT High & Low Beam
Headlight with FP & 3
Point Mount



Part Number
0550931

12-24 DOT/ECE LED
RHT High & Low Beam
Headlight with FP &
Panel Mount



Part Number
0550941

12-24 ECE LED LHT
High & Low Beam
Headlight with FP &
Panel Mount