
PRODUCT INFORMATION

Description	12-24 ECE LED LHT High & Low Beam Headlight with FP & 3 Point Mount	
Height	129.79 mm / 5.11 in	
Width	168.66 mm / 6.64 in	
Depth	87.38 mm / 3.44 in	
Shape	Rectangular	
Outer Lens Material	Polycarbonate	
Outer Lens Color	Clear	
Housing Material	Aluminum	30 - B
Housing Color	Black	
Bezel Color	Black	
Mounting Type	3 Point Mount	•
Connector or Wiring	12" Flying Leads	
Product Weight	2.50 lbs / 1.13 kgs	
Shipping Weight	2.84 lbs / 1.29 kgs	

PRODUCT DIMENSIONS



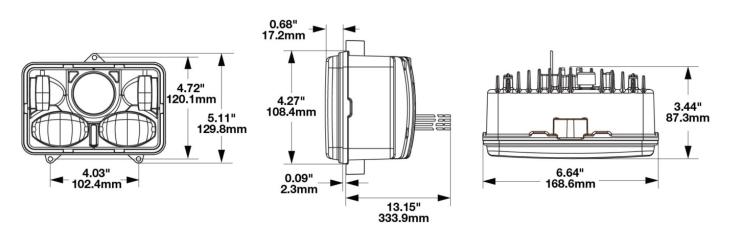

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	10-30V DC
Black Wire	Ground
White Wire	High Beam
Yellow Wire	Low Beam
Red Wire	Front Position
Current Draw	1.11A @ 12V DC (Low Beam) 0.96A @ 24V DC (Low Beam) 2.14A @ 12V DC (High Beam) 1.56A @ 24V DC (High Beam) 0.056A @ 12V DC (Front Position) 0.065A @ 24V DC (Front Position)

REGULATORY STANDARDS COMPLIANCE




Buy America Standards ECE Reg 7 IEC IP67

ECE Reg 112 Eco Friendly



PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	2,100 (High Beam); 1,850 (Low Beam)
Effective Lumen Output	755 (High Beam); 645 (Low Beam)
Beam Pattern(s)	Forward Lighting - High Beam (DOT/ECE) Forward Lighting - Low Beam (ECE Left Hand) Signalization - Front Position

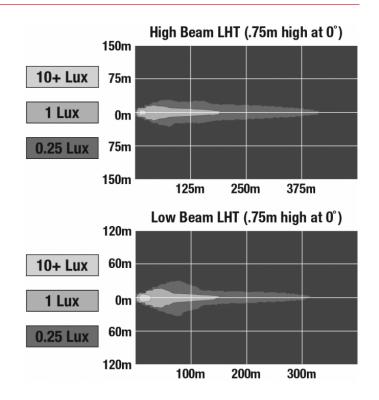

APPLICATIONS



PRODUCT WARNINGS

For California residents: ▲ WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>. ▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.

Print date: 2024-04-24 © 2024 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



RELATED PRODUCTS







Part Number 0550931 12-24 DOT/ECE LED RHT High & Low Beam Headlight with FP & Panel Mount



Part Number 0550941 12-24 ECE LED LHT High & Low Beam Headlight with FP & Panel Mount

