#### **PRODUCT INFORMATION**

**Description** 12-24V SAE/ECE LED Symmetric 5-in-1

Headlight

 Height
 90.00 mm / 3.54 in

 Width
 90.00 mm / 3.54 in

 Depth
 126.00 mm / 4.96 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Die Cast Aluminum

Housing Color Black

**Minimum Operating**  $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$ 

**Temperature** 

**Maximum Operating** 65 °C / 149 °F


**Temperature** 


Mating ConnectorDEUTSCH DT06-6SProduct Weight1.50 lbs / 0.68 kgsShipping Weight1.65 lbs / 0.75 kgs






#### **PRODUCT DIMENSIONS**







Print date: 2025-12-29

#### **ELECTRICAL SPECIFICATIONS**

Input Voltage12-24V DCOperating Voltage9-32V DC

**Transient Spike Protection** 150V Peak @ 1 HZ-100 Pulses

Yellow Wire Low Beam
Red Wire Front Position

Orange Wire N/A
Blue Wire DRL
Black Wire Ground
White Wire High Beam

**Current Draw** 1.35A @ 12V DC (Low Beam)

1.96A @ 12V DC (High Beam) 0.111A @ 12V DC (Front Position)

1.133A @ 12V DC (DRL) 0.701A @ 24V DC (Low Beam) 1.03A @ 24V DC (High Beam) 0.071A @ 24V DC (Front Position)

0.711A @ 24V DC (DRL)

### **REGULATORY STANDARDS COMPLIANCE**







ECE Reg 148 - A ECE Reg 148 - RL ECE Reg 149 - WC-DS ECE Reg 149 - WR-DS

IEC IP69K SAE J222

**SAE J584** 



#### PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2650(High Beam), 1750(Low

Beam)

**Effective Lumen** 790(High Beam), 650(Low Beam)

Output

Candela Output 44,000(High Beam), 23,000(Low

Beam) 5815 K

**Nominal LED Color** 

Temperature

**Beam Pattern(s)** Forward Lighting - Daytime

Running Light


Forward Lighting - High Beam


(DOT/ECE)

Forward Lighting - Low Beam

(DOT/ECE)

Signalization - Front Position

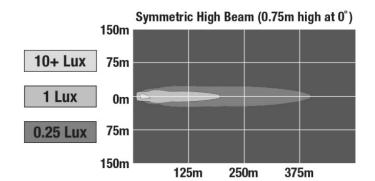

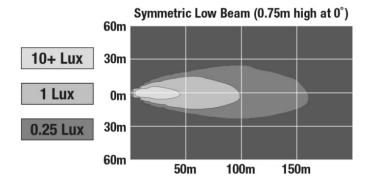

#### **APPLICATIONS**





### **PRODUCT WARNINGS**

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <a href="www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>.



#### **ACCESSORIES**



**Part Number** 3271981 5 Function Wire Assembly for Model 93



**Part Number** 3272001 SAE/DOT Motorcycle Wire Assembly without Assembly without DI DI/DRL for Model 93



**Part Number** 3272011 ECE Motorcycle Wire for Model 93



**Part Number** 8001461 90mm Light 3-Point Mount for 1.5mm Mounting Frame



**Part Number** 8001471 90mm Light 3-Point Mount for 3mm Mounting Frame



**Part Number** 8001601 Pedestal Mounting Bracket for Model 93 Single Lamp



**Part Number** 8001621 **Pedestal Mounting** Bracket for Model 93 Double Lamp



**Part Number** 8201021 90mm 3-Point Lock Mount for 3mm Mounting Frame

#### **RELATED PRODUCTS**



Part Number 0347941 12-24V SAE/ECE LED Turn Signal with DRL Function



Part Number 0530091 12-24V DOT/ECE RHT LED High & Low Beam Headlight with Front Position



Part Number 0530101 12-24V ECE LHT LED High & Low Beam Headlight with Front Position



Part Number 0553071 12-24V DOT/ECE LED High Beam Headlight



Part Number 0553081 12-24V DOT/ECE Symmetric LED Low Beam Headlight



Part Number 0553091 12-24V ECE LHT LED Low Beam Headlight



Part Number 0553101 12-24V DOT/ECE RHT LED Low Beam Headlight



Part Number 0554381 12-24V DOT/ECE LED High Beam Headlight with Front Position