
### **PRODUCT INFORMATION**

Description	12-24V DOT/ECE LED High Beam Headlight with Front Position	
Height	90.00 mm / 3.54 in	- Pa
Width	90.00 mm / 3.54 in	
Depth	95.00 mm / 3.74 in	
Shape	Round	
<b>Outer Lens Material</b>	Polycarbonate	
Outer Lens Color	Clear	
Housing Material	Die-Cast Aluminum	
Housing Color	Black	
Bezel Color	Black	
Minimum Operating Temperature	-40 °C / -40 °F	
Maximum Operating Temperature	65 °C / 149 °F	
<b>Connector or Wiring</b>	Deutsch DT04-3P	MODEL
Mating Connector	Deutsch DT06-3S	
Product Weight	1.22 lbs / 0.55 kgs	
Shipping Weight	1.44 lbs / 0.65 kgs	

## **PRODUCT DIMENSIONS**



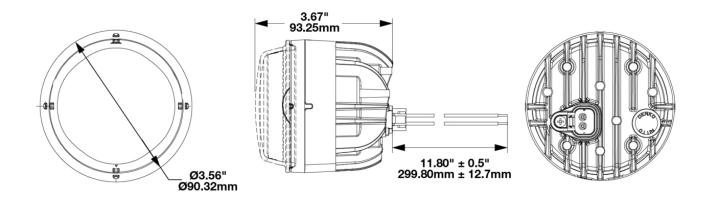

## **ELECTRICAL SPECIFICATIONS**

Input Voltage	12-24V DC			
Operating Voltage	10-31V DC			
<b>Transient Spike Protection</b>	150V Peak @ 1 HZ-100 Pulses			
Black Wire	Ground			
White Wire	High Beam			
Yellow Wire	Front Position			
Current Draw	0.80A @ 12V DC (High Beam) 0.40A @ 24V DC (High Beam) 0.40A @ 12V DC (Front Position) 0.20A @ 24V DC (Front Position)			

#### **REGULATORY STANDARDS COMPLIANCE**



Buy America Standards ECE Reg 112 Eco Friendly IEC IP69K ECE Reg 10 ECE Reg 7 FMVSS 108 s10.1 (Table XVIII)

#### **PHOTOMETRIC SPECIFICATIONS**

Raw Lumen Output	630	90m		High Beam (.75m high at 0°)	
Effective Lumen Output	230	10+ Lux	45m		
Candela Output	45,000	TOT LUX	45111		
Nominal LED Color Temperature	5000 K	1 Lux	0m		
Beam Pattern(s)	Forward Lighting - High Beam (DOT/ECE) Signalization - Front Position	0.25 Lux	45m		
			90m	100m 200m	





### **APPLICATIONS**



### ADDITIONAL INFORMATION

This is a single light, including (1) lamp and mounting hardware.

Headlight must be securely mounted and properly aimed such that the beam pattern cut off line complies with all applicable regulations. If you are not familiar with the legal requirements for aiming your headlights, please see a professional service provider. We recommend that headlights are aimed with a headlight aiming system for proper alignment.

This is an FMVSS UB6 high beam. It requires that the low beam is powered at the same time as the high beam to be compliant for use on the road.

3-point Mount for 1.5mm Mounting Frame is applicable for

- PN 0554381
- PN 0553071
- PN 0553091
- PN 0553101
- PN 0553081
- PN 0556701
- PN 0347941
- 3-point Mount for 3mm Mounting Frame is applicable for
- All Model 93 Lighting Options

#### **PRODUCT WARNINGS**

For California residents:

**WARNING:** Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.



#### **ACCESSORIES**



Part Number 3271981 5 Function Wire Assembly for Model 93



**Part Number** 3272001 SAE/DOT Motorcycle Wire Assembly without Assembly without DI DI/DRL for Model 93



**Part Number** 3272011 ECE Motorcycle Wire for Model 93



**Part Number** 8001461 90mm Light 3-Point Mount for 1.5mm Mounting Frame



**Part Number** 8001471 90mm Light 3-Point Mount for 3mm Mounting Frame



Part Number 8001601 Pedestal Mounting Bracket for Model 93 Single Lamp



Part Number 8001621 Pedestal Mounting Bracket for Model 93 **Double Lamp** 



Part Number 8201021 90mm 3-Point Lock Mount for 3mm Mounting Frame



### **RELATED PRODUCTS**



Part Number 0347941 12-24V SAE/ECE LED Turn Signal with DRL Function



Part Number 0553071 12-24V DOT/ECE LED High Beam Headlight



Part Number 0553081 12-24V DOT/ECE Symmetric LED Low Beam Headlight



Part Number 0553091 12-24V ECE LHT LED Low Beam Headlight



Part Number 0553101 12-24V DOT/ECE RHT LED Low Beam Headlight



Part Number 0556701 12-24V SAE/ECE LED Fog Light



Part Number 0560371 12-24V DOT/ECE RHT LED 5-in-1 Headlight



Part Number 0560381 12-24V ECE LHT LED 5-in-1 Headlight

