### PRODUCT INFORMATION

**Description** 12-24V ECE LHT LED 5-in-1 Headlight

with Mount - (Bulk Qty. x16 lights &

mounts)

 Height
 90.00 mm / 3.54 in

 Width
 90.00 mm / 3.54 in

 Depth
 126.00 mm / 4.96 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens ColorClearHousing MaterialAluminumHousing ColorBlack

**Minimum Operating**  $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$ 

**Temperature** 

Maximum Operating 65 °C / 149 °F

**Temperature** 

Mating ConnectorDeutsch DT06-6SProduct Weight1.33 lbs / 0.6 kgsShipping Weight22.77 lbs / 10.33 kgs

**Additional Information** 3-point MOUNTING RINGS ARE FULLY

ASSEMBLED TO LAMPS.

CUSTOMER TO PROVIDE 10mm SOCKET

**HARDWARE** 


FOR MOUNTING TO 3mm PANEL

THICKNESS


WIRES ARE NOT INCLUDED WITH LAMP








### **PRODUCT DIMENSIONS**

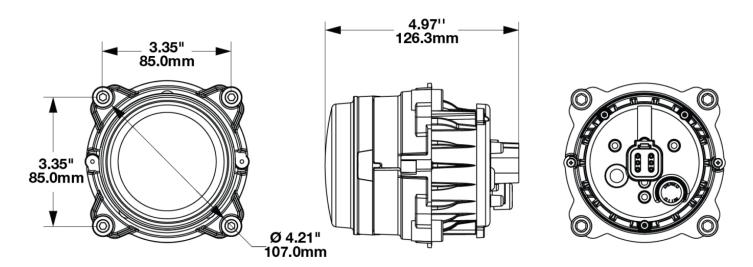

**Pin Out Diagram & Wiring Information** 





### **ELECTRICAL SPECIFICATIONS**

Input Voltage12-24V DCOperating Voltage9-32V DC

**Transient Spike Protection** 150V Peak @ 1 HZ-100 Pulses

Pin 1 WireLow BeamPin 2 WireFront Position

Pin 3 WireDIPin 4 WireDRLPin 5 WiregROUNDPin 6 WireHigh Beam

Current Draw 1.13A @ 12V DC (Low Beam)

1.45A @ 12V DC (High Beam) 0.111A @ 12V DC (Front Position)

1.00A @ 12V DC (DRL) 1.00A @ 12V DC (DI)

0.575A @ 24V DC (Low Beam) 0.737A @ 24V DC (High Beam) 0.070A @ 24V DC (Front Position)

0.511A @ 24V DC (DRL) 0.472A @ 24V DC (DI)

### **REGULATORY STANDARDS COMPLIANCE**







ECE Reg 10 ECE Reg 148 - 1b
ECE Reg 148 - A ECE Reg 148 - RL
ECE Reg 149 - HC ECE Reg 149 - R
IEC IP67 IEC IP69K



### PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2650(High Beam), 1750(Low

Beam)

**Effective Lumen** 790(High Beam), 650(Low Beam)

Output

**Candela Output** 44,000(High Beam), 23,000(Low

Beam)

**Nominal LED Color** 

5665 K **Temperature** 

Beam Pattern(s) Forward Lighting - Daytime


Running Light


Forward Lighting - High Beam

Forward Lighting - Low Beam (ECE

Left Hand)

Signalization - Front Position Signalization - Turn (Front)

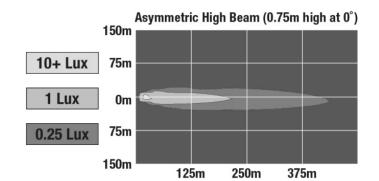

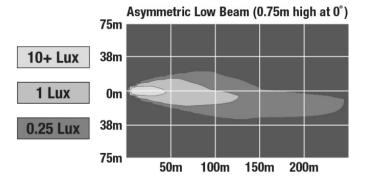

#### **PRODUCT WARNINGS**

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.



### **ACCESSORIES**



**Part Number** 3271981 5 Function Wire Assembly for Model 93



**Part Number** 3272001 SAE/DOT Motorcycle Wire Assembly without Assembly without DI DI/DRL for Model 93



**Part Number** 3272011 ECE Motorcycle Wire for Model 93



**Part Number** 8001461 90mm Light 3-Point Mount for 1.5mm Mounting Frame



**Part Number** 8001471 90mm Light 3-Point Mount for 3mm Mounting Frame



**Part Number** 8001601 Pedestal Mounting Bracket for Model 93 Single Lamp



**Part Number** 8001621 **Pedestal Mounting** Bracket for Model 93 Double Lamp



**Part Number** 8201021 90mm 3-Point Lock Mount for 3mm Mounting Frame

### **RELATED PRODUCTS**



Part Number 0347941 12-24V SAE/ECE LED Turn Signal with DRL Function



Part Number 0530091 12-24V DOT/ECE RHT LED High & Low Beam Headlight with Front Position



Part Number 0530101 12-24V ECE LHT LED High & Low Beam Headlight with Front Position



Part Number 0530321 12-24V SAE/ECE LED Symmetric 5-in-1 Headlight



Part Number 0553071 12-24V DOT/ECE LED High Beam Headlight



Part Number 0553081 12-24V DOT/ECE Symmetric LED Low Beam Headlight



Part Number 0553091 12-24V ECE LHT LED Low Beam Headlight



Part Number 0553101 12-24V DOT/ECE RHT LED Low Beam Headlight