

90mm LED Headlight - Model 93

PRODUCT INFORMATION

| | |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | 12-24V ECE LHT LED 5-in-1 Headlight with Mount - (Bulk Qty. x16 lights & mounts) |
| Height | 90.00 mm / 3.54 in |
| Width | 90.00 mm / 3.54 in |
| Depth | 126.00 mm / 4.96 in |
| Shape | Round |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Aluminum |
| Housing Color | Black |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Mating Connector | Deutsch DT06-6S |
| Product Weight | 1.33 lbs / 0.6 kgs |
| Shipping Weight | 22.77 lbs / 10.33 kgs |
| Additional Information | 3-point MOUNTING RINGS ARE FULLY ASSEMBLED TO LAMPS. CUSTOMER TO PROVIDE 10mm SOCKET HARDWARE FOR MOUNTING TO 3mm PANEL THICKNESS WIRES ARE NOT INCLUDED WITH LAMP |




Print date: 2025-05-09

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660


J.W. SPEAKER®
Engineered. Lighting. Solutions.

90mm LED Headlight - Model 93

PRODUCT DIMENSIONS

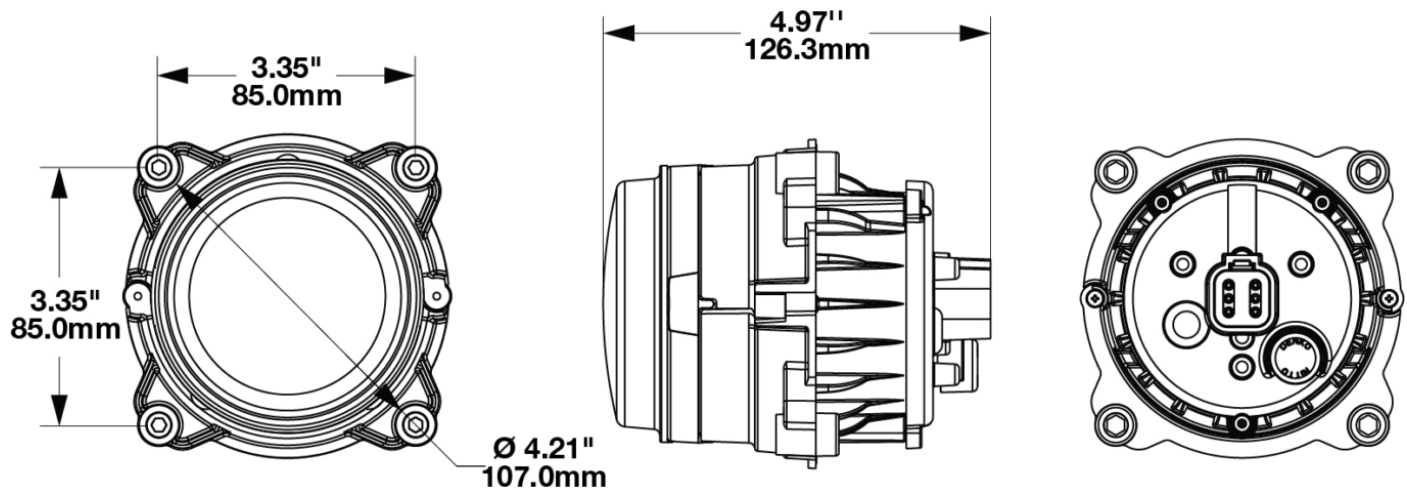

Pin Out Diagram & Wiring Information

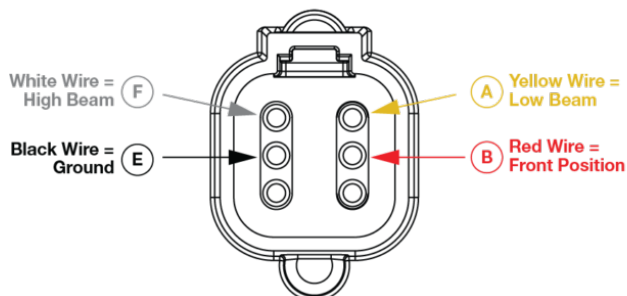

Print date: 2025-05-09

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
Engineered. Lighting. Solutions.

90mm LED Headlight - Model 93

ELECTRICAL SPECIFICATIONS

| | |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input Voltage | 12-24V DC |
| Operating Voltage | 9-32V DC |
| Transient Spike Protection | 150V Peak @ 1 HZ-100 Pulses |
| Pin 1 Wire | Low Beam |
| Pin 2 Wire | Front Position |
| Pin 3 Wire | DI |
| Pin 4 Wire | DRL |
| Pin 5 Wire | gROUND |
| Pin 6 Wire | High Beam |
| Current Draw | 1.13A @ 12V DC (Low Beam) 1.45A @ 12V DC (High Beam) 0.111A @ 12V DC (Front Position) 1.00A @ 12V DC (DRL) 1.00A @ 12V DC (DI) 0.575A @ 24V DC (Low Beam) 0.737A @ 24V DC (High Beam) 0.070A @ 24V DC (Front Position) 0.511A @ 24V DC (DRL) 0.472A @ 24V DC (DI) |

REGULATORY STANDARDS COMPLIANCE



ECE Reg 10
ECE Reg 148 - A
ECE Reg 149 - HC
IEC IP67



ECE Reg 148 - 1b
ECE Reg 148 - RL
ECE Reg 149 - R
IEC IP69K

Print date: 2025-05-09


© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
Engineered. Lighting. Solutions.

90mm LED Headlight - Model 93

PHOTOMETRIC SPECIFICATIONS

| | |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Raw Lumen Output | 2650(High Beam), 1750(Low Beam) |
| Effective Lumen Output | 790(High Beam), 650(Low Beam) |
| Candela Output | 44,000(High Beam), 23,000(Low Beam) |
| Nominal LED Color Temperature | 5665 K |
| Beam Pattern(s) | Forward Lighting - Daytime Running Light Forward Lighting - High Beam (ECE) Forward Lighting - Low Beam (ECE Left Hand) Signalization - Front Position Signalization - Turn (Front) |

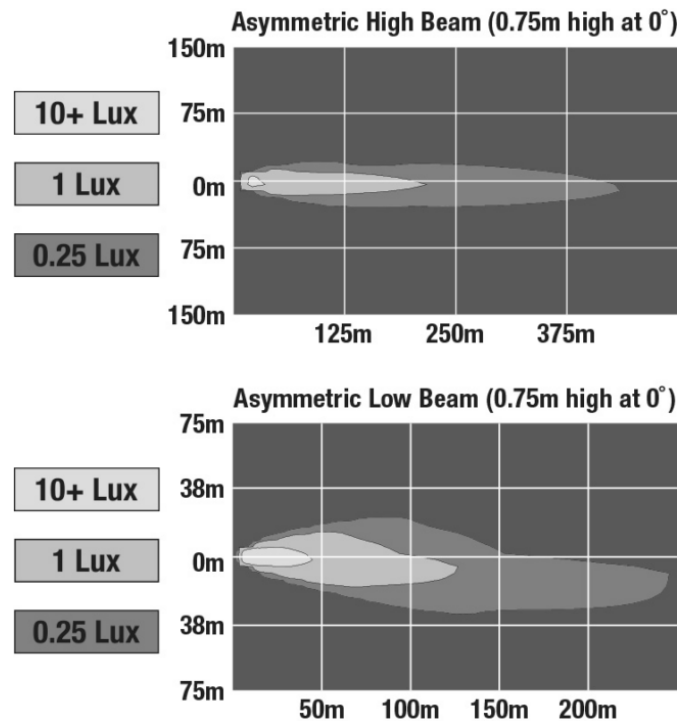

PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2025-05-09

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
 Engineered. Lighting. Solutions.

90mm LED Headlight - Model 93

ACCESSORIES



Part Number
3271981
5 Function Wire
Assembly for Model 93



Part Number
3272001
SAE/DOT Motorcycle
Wire Assembly without
DI/DRL for Model 93



Part Number
3272011
ECE Motorcycle Wire
Assembly without DI
for Model 93



Part Number
8001461
90mm Light 3-Point
Mount for 1.5mm
Mounting Frame



Part Number
8001471
90mm Light 3-Point
Mount for 3mm
Mounting Frame



Part Number
8001601
Pedestal Mounting
Bracket for Model 93
Single Lamp



Part Number
8001621
Pedestal Mounting
Bracket for Model 93
Double Lamp



Part Number
8201021
90mm 3-Point Lock
Mount for 3mm
Mounting Frame

90mm LED Headlight - Model 93

RELATED PRODUCTS



Part Number
0347941

12-24V SAE/ECE LED
Turn Signal with DRL
Function



Part Number
0530091

12-24V DOT/ECE RHT
LED High & Low Beam
Headlight with Front
Position



Part Number
0530101

12-24V ECE LHT LED
High & Low Beam
Headlight with Front
Position



Part Number
0553071

12-24V DOT/ECE LED
High Beam Headlight



Part Number
0553081

12-24V DOT/ECE
Symmetric LED Low
Beam Headlight



Part Number
0553091

12-24V ECE LHT LED
Low Beam Headlight



Part Number
0553101

12-24V DOT/ECE RHT
LED Low Beam
Headlight



Part Number
0554381

12-24V DOT/ECE LED
High Beam Headlight
with Front Position