### **PRODUCT INFORMATION**

**Description** 12V DOT/ECE LED High & Low Beam

Adaptive Headlight with Black Inner

Bezel

 Height
 177.20 mm / 6.98 in

 Width
 177.20 mm / 6.98 in

 Depth
 93.68 mm / 3.69 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens Color Clear
Housing Material Aluminum
Housing Color Grey
Bezel Color Black

**Retrofits** Bucket 7" Round Headlights (PAR56)

**Minimum Operating**  $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$ 

**Temperature** 

**Maximum Operating**  $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$ 

**Temperature** 


Connector or Wiring H4

Mating ConnectorH4 AMP# 172615-2Product Weight3.40 lbs / 1.54 kgsShipping Weight3.25 lbs / 1.47 kgs





# **PRODUCT DIMENSIONS**

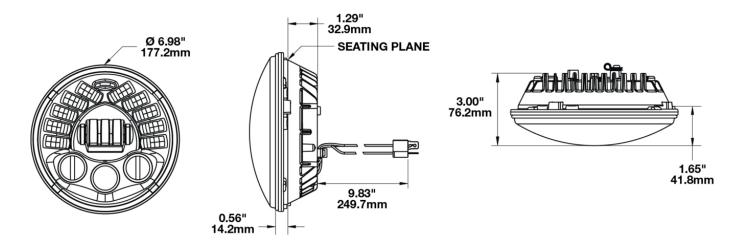

### **ELECTRICAL SPECIFICATIONS**


Input Voltage12V DCOperating Voltage9-16V DC

**Transient Spike Protection** 150V Peak @ 1 HZ-100 Pulses

Black Wire Ground
White Wire High Beam
Yellow Wire Low Beam
Red Wire Front Position

**Current Draw** 2.9A @ 13.5V DC (High Beam) 1.9A @ 13.5V DC (Low Beam)

0.092A @ 13.5V DC (Front Position) 3.5A @ 13.5V DC (Low Beam at Full Lean) 4.5A @ 13.5V DC (High Beam at Full Lean)



## **REGULATORY STANDARDS COMPLIANCE**







ECE Reg 113

Eco Friendly







Buy America Standards ECE Reg 50

FMVSS 108 s10.1 (Table XX) IEC IP67

Tested to ECE Reg. 10 (Radiated Emissions only)

#### PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2,250 (High Beam), 2,025 (Low

Beam)

**Effective Lumen** 1,150 (High Beam), 850 (Low

Output Beam)

Candela Output 48,000 (High Beam), 1,150 (Low

Beam) 5000 K

Nominal LED Color

**Temperature** 


**Beam Pattern(s)** Forward Lighting - High Beam


(DOT/ECE)

Forward Lighting - Low Beam

(DOT/ECE)

Signalization - Front Position

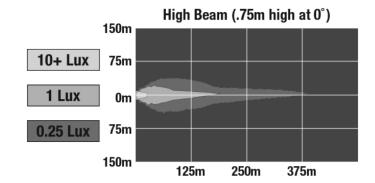

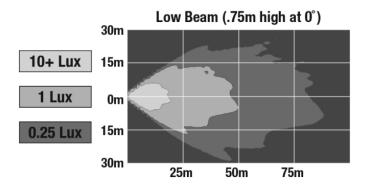



# **APPLICATIONS**





#### **ADDITIONAL INFORMATION**

### Improvements over the original Adaptive Series

The NEW Adaptive 2 Series headlights have been improved to feature Adaptive technology when using the high beam, in addition to the low beam. Providing ditch-to-ditch lighting to eliminate dark corners on sharp turns and a punch of light 1,500 feet down the road to give you a safer and more confident ride.

#### Red Wire

Note about Front Position: The front position light is a requirement outside the United States. If your bike is operated in the United States you do NOT need to connect this wire (red) unless your bike is equipped with a front position light.

### **PRODUCT WARNINGS**

For California residents:

<u> **MARNING:**</u> Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

#### **ACCESSORIES**



### Part Number 3156351 Mounting Ring Kit for 7" Round (PAR56) Headlights



**Part Number** 

8200411 Wire Harness H4 for 7" Round (PAR56) Headlights

**RELATED PRODUCTS** 



Part Number 0555031 12V DOT/ECE LED High & Low Beam Adaptive Headlight with Chrome Inner Bezel



Part Number 0555051 12V DOT/ECE LED High & Low Beam Adaptive Headlight with Black Inner Bezel and Mounting Ring



Part Number 0555061 12V DOT/ECE LED High & Low Beam Adaptive Headlight with Chrome Inner Bezel and Mounting Ring