


# LED Compact Work Light - Model 792

## PRODUCT INFORMATION

|                                      |  |
|--------------------------------------|--|
| <b>Description</b>                   | 12-24V LED Compact Work Light with Panel Mount               |
| <b>Height</b>                        | 82.06 mm / 3.23 in   |
| <b>Width</b>                         | 98.80 mm / 3.89 in   |
| <b>Depth</b>                         | 43.40 mm / 1.71 in   |
| <b>Shape</b>                         | Rectangular  |
| <b>Outer Lens Material</b>           | Polycarbonate  |
| <b>Outer Lens Color</b>              | Clear  |
| <b>Housing Material</b>              | Aluminum   |
| <b>Housing Color</b>                 | Black  |
| <b>Mounting Type</b>                 | Panel  |
| <b>Minimum Operating Temperature</b> | -40 °C / -40 °F  |
| <b>Maximum Operating Temperature</b> | 65 °C / 149 °F   |
| <b>Mating Connector</b>              | JAE Connector MX19A003S51 harness included with flying leads |
| <b>Product Weight</b>                | 0.40 lbs / 0.18 kgs  |
| <b>Shipping Weight</b>               | 7.19 lbs / 3.26 kgs  |



## PRODUCT DIMENSIONS

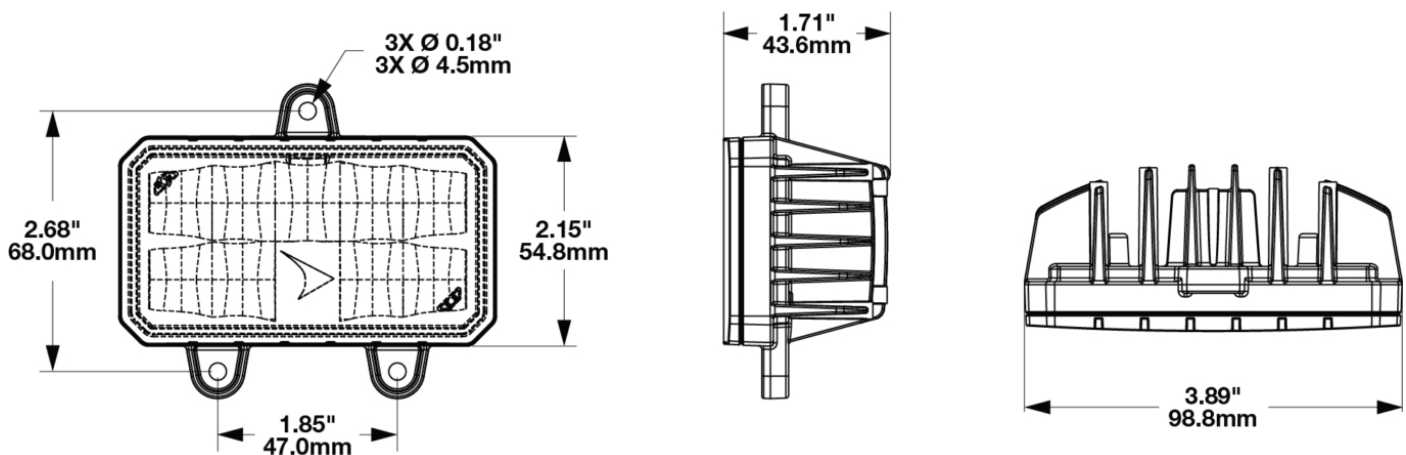

Print date: 2026-05-24

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
Engineered. Lighting. Solutions.

# LED Compact Work Light - Model 792

## ELECTRICAL SPECIFICATIONS

|                                   |  |
|-----------------------------------|--|
| <b>Input Voltage</b>              | 12-24V DC                                      |
| <b>Operating Voltage</b>          | 9-30V DC                                       |
| <b>Transient Spike Protection</b> | 330V Peak @ 1 HZ-100 Pulses                    |
| <b>Red Wire</b>                   | Power  |
| <b>Black Wire</b>                 | Ground   |
| <b>Current Draw</b>               | 2.2A @ 12V DC (Power)<br>1.0A @ 24V DC (Power) |

## REGULATORY STANDARDS COMPLIANCE




Buy America Standards  
IEC IP67

Eco Friendly  
IEC IP69K

## PHOTOMETRIC SPECIFICATIONS

|                                      |        |
|--------------------------------------|--------|
| <b>Raw Lumen Output</b>              | 3630   |
| <b>Effective Lumen Output</b>        | 2000   |
| <b>Candela Output</b>                | 2900   |
| <b>Nominal LED Color Temperature</b> | 5050 K |

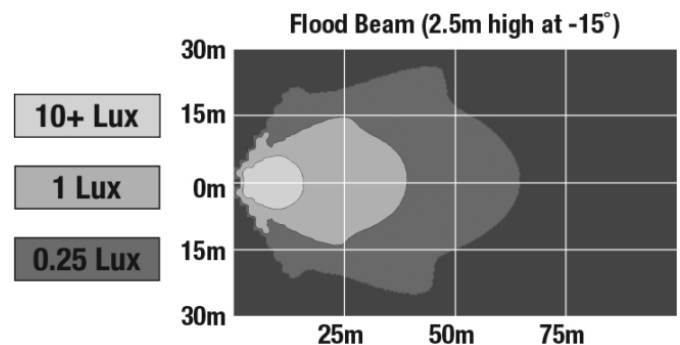

Print date: 2026-05-24

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Compact Work Light - Model 792

## APPLICATIONS

---



## PRODUCT WARNINGS

---

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## ACCESSORIES

---



**Part Number**

**8201241**

DIN Pole Mount for  
Work Lights

# LED Compact Work Light - Model 792

## RELATED PRODUCTS

---



**Part Number**  
**1603921**  
12-24V LED Compact  
Work Light with  
Pedestal Mount



**Part Number**  
**1603931**  
36-80V LED Compact  
Work Light with  
Pedestal Mount



**Part Number**  
**1603932**  
36-80V LED Compact  
Work Light with  
Pedestal Mount (BULK  
with Harness)



**Part Number**  
**1603971**  
36-80V LED Compact  
Work Light with Panel  
Mount



**Part Number**  
**1604241**  
12-24V LED Anti-Glare,  
590Nm, Eco-Friendly  
Work Light with  
Pedestal Mount and  
Harness