
LED Compact Work Light - Model 792

PRODUCT INFORMATION

Description	12/24V Compact LED Work Light with Pedestal Mount (BULK without Harness)	
Height	76.10 mm / 3 in	
Width	98.80 mm / 3.89 in	line and line
Depth	43.40 mm / 1.71 in	A DIA A
Shape	Rectangular	
Outer Lens Material	Polycarbonate	
Outer Lens Color	Clear	
Housing Material	Aluminum	
Housing Color	Black	
Mounting Hardware Description	(x1) 5/16"-18 x 1.00" Mounting Bolt Bracket	
Mounting Type	Pedestal	
Minimum Operating Temperature	-40 °C / -40 °F	
Maximum Operating Temperature	65 °C / 149 °F	MODEL
Product Weight	0.40 lbs / 0.18 kgs	
Shipping Weight	10.82 lbs / 4.91 kgs	

PRODUCT DIMENSIONS



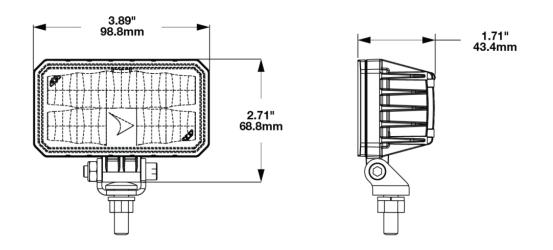

LED Compact Work Light - Model 792

ELECTRICAL SPECIFICATIONS


Input Voltage	12-24V DC
Operating Voltage	9-30V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Red Wire	Power
Black Wire	Ground
Current Draw	2.2A @ 12V DC (Power) 1.0A @ 24V DC (Power)

REGULATORY STANDARDS COMPLIANCE



IEC IP67 Tested to ECE Reg. 10 (Radiated Emissions only) IEC IP69K

PHOTOMETRIC SPECIFICATIONS

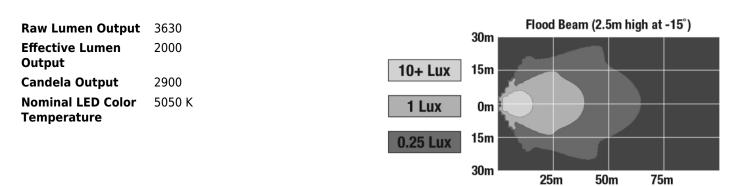



LED Compact Work Light - Model 792

PRODUCT WARNINGS

For California residents: ▲ WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>. ▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.

RELATED PRODUCTS



Part Number 1603921 12/24V Compact LED Work Light with Pedestal Mount



Part Number 1603931 36/90V Compact LED Work Light with Pedestal Mount



Part Number 1603932 36/90V Compact LED Work Light with Pedestal Mount (BULK with Harness)



Part Number 1603951 12/24V Compact LED Work Light with Panel Mount



Part Number 1603971 36/90V Compact LED Work Light with Panel Mount

