

# LED Compact Work Light - Model 792


## PRODUCT INFORMATION

|                                      |  |
|--------------------------------------|--|
| <b>Description</b>                   | 12-24V LED Anti-Glare, Eco-Friendly Work Light with Pedestal Mount and Harness |
| <b>Height</b>                        | 76.10 mm / 3 in  |
| <b>Width</b>                         | 98.80 mm / 3.89 in   |
| <b>Depth</b>                         | 43.40 mm / 1.71 in   |
| <b>Shape</b>                         | Rectangular  |
| <b>Outer Lens Material</b>           | Polycarbonate  |
| <b>Outer Lens Color</b>              | Clear  |
| <b>Housing Material</b>              | Aluminum Die Cast  |
| <b>Housing Color</b>                 | Black  |
| <b>Mounting Hardware Description</b> | (x1) 8mm-20 x 25mm Mounting Bolt<br>Bracket                                    |
| <b>Mounting Type</b>                 | Pedestal   |
| <b>Mating Connector</b>              | JAE Connector MX19A003S51 harness included with flying leads                   |
| <b>Product Weight</b>                | 0.40 lbs / 0.18 kgs  |
| <b>Shipping Weight</b>               | 7.19 lbs / 3.26 kgs  |



MODEL  
**792**

## PRODUCT DIMENSIONS

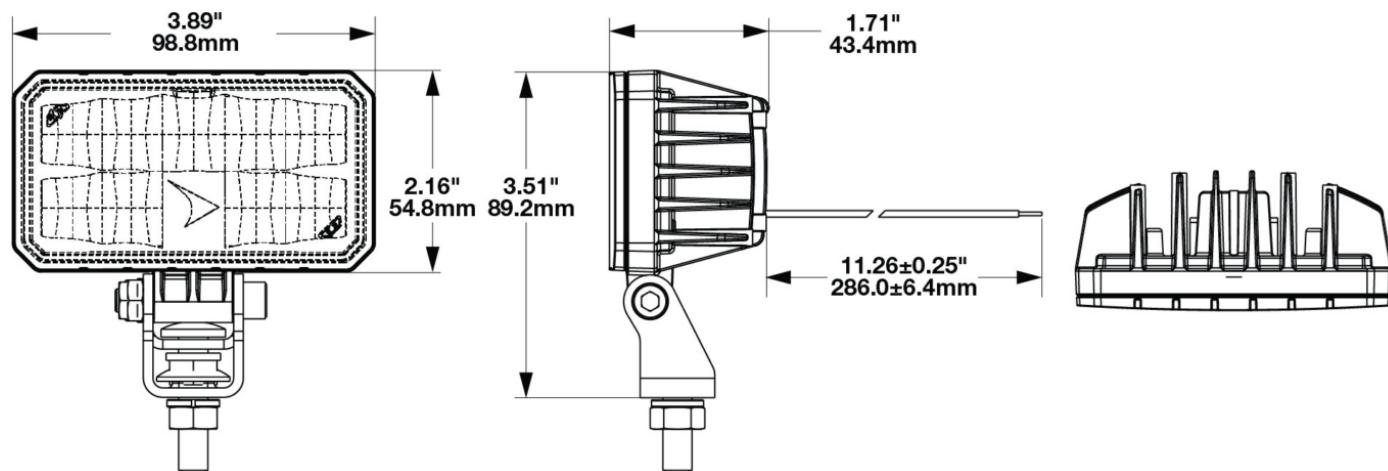

Print date: 2026-01-21

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**®  
Engineered. Lighting. Solutions.

# LED Compact Work Light - Model 792

## ELECTRICAL SPECIFICATIONS

|                          |  |
|--------------------------|--|
| <b>Input Voltage</b>     | 12-24V DC  |
| <b>Operating Voltage</b> | 9-30V DC   |
| <b>Red Wire</b>          | Power  |
| <b>Black Wire</b>        | Ground   |
| <b>Current Draw</b>      | 1.36A @ 12V DC (Power)<br>0.69A @ 24V DC (Power) |

## REGULATORY STANDARDS COMPLIANCE




IEC IP67

IEC IP69K

## PHOTOMETRIC SPECIFICATIONS

|                                      |        |
|--------------------------------------|--------|
| <b>Effective Lumen Output</b>        | 970    |
| <b>Candela Output</b>                | 4000   |
| <b>Nominal LED Color Temperature</b> | 1850 K |

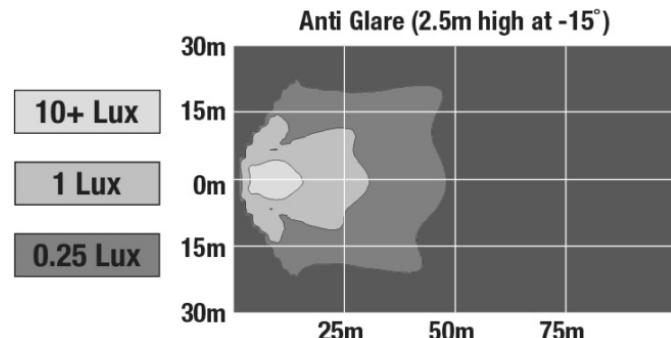

## PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Print date: 2026-01-21

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
[www.jwspeaker.com](http://www.jwspeaker.com) • [speaker@jwspeaker.com](mailto:speaker@jwspeaker.com) • 262.251.6660

# LED Compact Work Light - Model 792

## ACCESSORIES



**Part Number**  
**8201241**

DIN Pole Mount for  
Work Lights

## RELATED PRODUCTS



**Part Number**  
**1603921**  
12-24V LED Compact  
Work Light with  
Pedestal Mount



**Part Number**  
**1603931**  
36-80V LED Compact  
Work Light with  
Pedestal Mount



**Part Number**  
**1603932**  
36-80V LED Compact  
Work Light with  
Pedestal Mount (BULK  
with Harness)



**Part Number**  
**1603951**  
12-24V LED Compact  
Work Light with Panel  
Mount



**Part Number**  
**1603971**  
36-80V LED Compact  
Work Light with Panel  
Mount