### **PRODUCT INFORMATION**

**Description** 12-110V LED 3- Pin Warehouse Work

Light with Vertical Flood Beam Pattern

 Height
 130.00 mm / 5.12 in

 Width
 159.00 mm / 6.26 in

 Depth
 43.00 mm / 1.69 in

**Shape** Stylized

Outer Lens MaterialPolycarbonateOuter Lens ColorBlack/ClearHousing MaterialPolycarbonate

Housing Color Black

**Mounting Hardware** (x1) M8-30.5mm Black Zinc Plate

**Description** Flange Bolt

Mounting Type Flush


**Connector or Wiring** Integrated 3-Pin Packard (12129615)

Mating ConnectorPackard 12110293Product Weight0.70 lbs / 0.32 kgsShipping Weight1.10 lbs / 0.5 kgs





#### PRODUCT DIMENSIONS

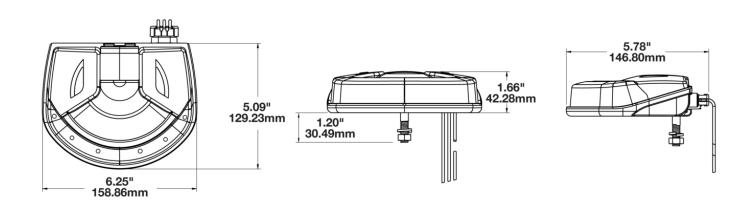



### **ELECTRICAL SPECIFICATIONS**

Input Voltage 12-110V DC Operating Voltage 9-110V DC

**Transient Spike Protection** 330V Peak @ 1 HZ-100 Pulses

Current Draw 1.54A @ 12V DC (3 LED's)

0.67A @ 24V DC (3 LED's)

0.33A @ 60V DC (3 LED's)

0.20A @ 110V DC (3 LED's)

1.59A @ 12V DC (6 LED's) 0.74A @ 24V DC (6 LED's)

0.34A @ 60V DC (6 LED's)

0.23A @ 110V DC (6 LED's)

### **REGULATORY STANDARDS COMPLIANCE**









Buy America Standards CISPR 12
Eco Friendly IEC IP67
SAE J1113-13 SAE J1113-21
SAE J1113-4 UL Recognized




## **PHOTOMETRIC SPECIFICATIONS**

**Raw Lumen Output** 2,000 (6 LEDs); 1,630 (3 LEDs) **Effective Lumen** 1,600 (6 LEDs); 780 (3 LEDs)

Output

**Beam Pattern(s)** Forward Lighting - Flood (Vertical)

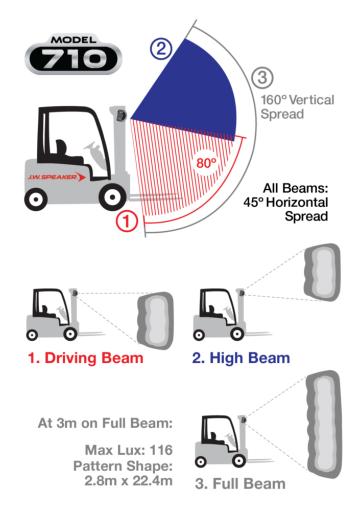

## **APPLICATIONS**













## **PRODUCT WARNINGS**

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

### **ACCESSORIES**



Part Number 8200501 Mounting Kit For Model 710 Work Light

#### **RELATED PRODUCTS**



Part Number 1000121 12-110V LED 2- Pin Warehouse Work Light with Vertical Flood Beam Pattern

