
PRODUCT INFORMATION

Description	12-110V LED 3- Pin Warehouse Work Light with Vertical Flood Beam Pattern	
Height	130.00 mm / 5.12 in	
Width	159.00 mm / 6.26 in	
Depth	43.00 mm / 1.69 in	
Shape	Stylized	H I
Outer Lens Material	Polycarbonate	
Outer Lens Color	Black/Clear	
Housing Material	Polycarbonate	
Housing Color	Black	
Mounting Hardware Description	(x1) M8-30.5mm Black Zinc Plate Flange Bolt	
Mounting Type	Flush	
Connector or Wiring	Integrated 3-Pin Packard (12129615)	
Mating Connector	Packard 12110293	MODEL
Product Weight	0.70 lbs / 0.32 kgs	(710)
Shipping Weight	1.10 lbs / 0.5 kgs	

PRODUCT DIMENSIONS



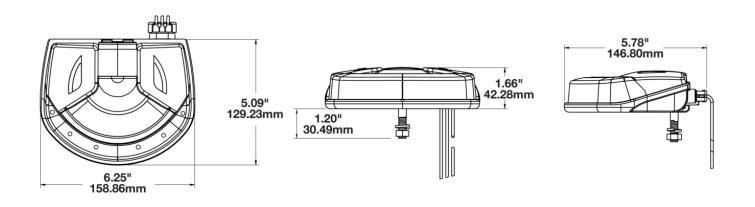

ELECTRICAL SPECIFICATIONS

Input Voltage	12-110V DC
Operating Voltage	9-110V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Current Draw	1.54A @ 12V DC (3 LED's) 0.67A @ 24V DC (3 LED's) 0.33A @ 60V DC (3 LED's) 0.20A @ 110V DC (3 LED's) 1.59A @ 12V DC (6 LED's) 0.74A @ 24V DC (6 LED's) 0.34A @ 60V DC (6 LED's) 0.23A @ 110V DC (6 LED's)

REGULATORY STANDARDS COMPLIANCE




Buy America Standards Eco Friendly SAE J1113-13 SAE J1113-4





PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	2,000 (6 LEDs); 1,630 (3 LEDs)
Effective Lumen Output	1,600 (6 LEDs); 780 (3 LEDs)
Beam Pattern(s)	Forward Lighting - Flood (Vertical)

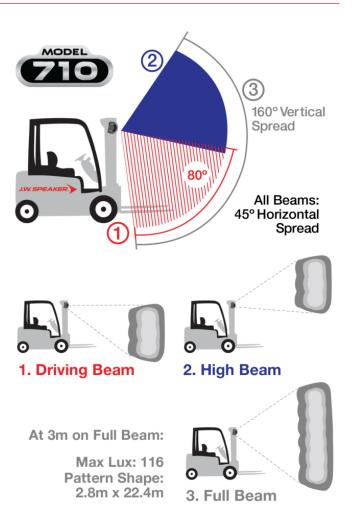

APPLICATIONS



Print date: 2025-06-10 © 2025 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



PRODUCT WARNINGS

For California residents: ▲ WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>. ▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.

ACCESSORIES



Part Number 8200501 Mounting Kit For Model 710 Work Light

RELATED PRODUCTS



Part Number 1000121 12-110V LED 2- Pin Warehouse Work Light with Vertical Flood Beam Pattern

