### PRODUCT INFORMATION

**Description** 12-24V DOT LED Heated Red Stop, Tail,

& Turn Light

 Height
 20.28 mm / 0.8 in

 Width
 110.14 mm / 4.34 in

 Depth
 39.53 mm / 1.56 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing ColorBlackBezel ColorRedMounting TypeGrommetConnector or WiringBare Leads

**Mating Connector** None. 3-Pin AMP Connector

(#282087-1) sold separately.

**Product Weight** 0.31 lbs / 0.14 kgs **Shipping Weight** 0.48 lbs / 0.22 kgs

**Additional Information** Power supplied in any mode will power


the heater. If power is not supplied to the heater, the light will not be heated.

Turn off power before installing.












# **PRODUCT DIMENSIONS**

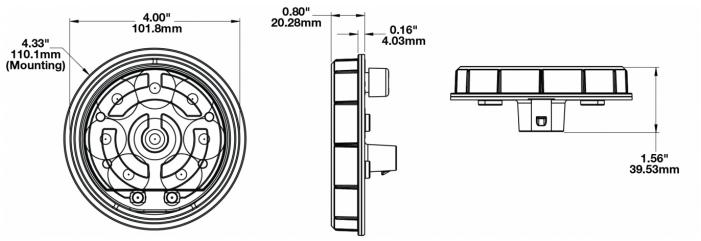


### **Pin Out Information**






# WIRE HARNESS\*



\*Wire harness sold separately on Part # 0346261. Wire harness included on Part # 0346264. Also available as a single accessory (Part # 3270501)



# **ELECTRICAL SPECIFICATIONS**

**Input Voltage** 12-24V DC 9-32V DC **Operating Voltage** 

**Current Draw** .03A @ 12V DC (Tail)

.02A @ 24V DC (Tail)

.17A @ 12V DC (Turn / Stop) .12A @ 24V DC (Turn / Stop) .80A @ 12V DC (Tail Heated) .40A @ 24V DC (Tail Heated)

1.0A @ 12V DC (Turn / Stop Heated) .50A @ 24V DC (Turn / Stop Heated)

.80A @ 12V DC (Heater) .40A @ 24V DC (Heater)

# **REGULATORY STANDARDS COMPLIANCE**













**Buy America Standards** 

**Eco Friendly** FMVSS 108 s7.1 (Table VII) FMVSS 108 s7.2 (Table VIII)

FMVSS 108 s7.3 (Table IX) IEC IP69K **SAE J585 SAE J586** 

**SAE J588** 

# PHOTOMETRIC SPECIFICATIONS

**Effective Lumen** 

Output

54

Beam Pattern(s)

Signalization - Tail

Signalization - Turn (Rear)



#### **APPLICATIONS**











#### **SMARTHEAT™ HEATING SYSTEM**

The SmartHeat<sup>™</sup> heating system senses ambient temperature and turns the integrated heating system in the lens on & off. This system actually clears ice & snow twice as fast as conventional halogen lamps.

#### When does the heater turn on?

Heater turns on or off according to temperature changes and vehicle power:

- Heater will turn on when temperatures drop, generating enough heat to prevent ice build-up.
- Heater will turn on when powering up, de-icing the light as rapidly as possible.

#### When does the heater turn off?

Heater will turn off when it senses temperatures increase and are above the high temperature threshold.

Learn more about this technology <a href="here">here</a>.

See Additional Information on page 1 for heated wire installation

# **PRODUCT WARNINGS**

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.



### **ACCESSORIES**



**Part Number** 4242731

4" Round Rubber Mounting Grommet for Model 234



**Part Number** 5869401

4" Round Plastic Mounting Flange for Model 234



**Part Number** 8200441

4" Round Stainless Steel Trim Ring for Model 234



**Part Number** 8200451

4" Round Chrome Plastic Trim Ring for Model 234



**Part Number** 3270501

3-Pin AMP Connector Wire Harness Assembly

### **RELATED PRODUCTS**





**Part Number** 0346264

12-24V DOT LED Heated Red Stop, Tail, & Turn Light Kit with Harness



**Part Number** 0346421

12-48V DOT LED Non-Heated Stop & Tail Light



**Part Number** 0346471

12-24V DOT LED Heated White Reverse Light



**Part Number** 0346474

12-24V DOT LED **Heated White Reverse** Light Kit with Harness



**Part Number** 0347811

12-24V DOT LED **Heated Amber Turn** Signal





12-24V DOT LED **Heated Amber Turn** Signal Kit with Harness & Turn Light



**Part Number** 0347861

12-24V DOT LED Non-Heated Red Stop, Tail,



### **Part Number** 0347864

12-24V DOT LED Non-Heated Red Stop, Tail, & Turn Light Kit with Harness

