PRODUCT INFORMATION

Description 12-24V DOT LED Heated White Reverse

Light Kit with Harness

Height 42.55 mm / 1.68 in

Width 110.14 mm / 4.34 in

Depth 20.28 mm / 0.8 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Connector or Wiring AMP 282087-1

Mating Connector 3-Pin AMP Connector (#282087-1)

Product Weight 0.36 lbs / 0.16 kgs


Shipping Weight 0.54 lbs / 0.24 kgs














PRODUCT DIMENSIONS

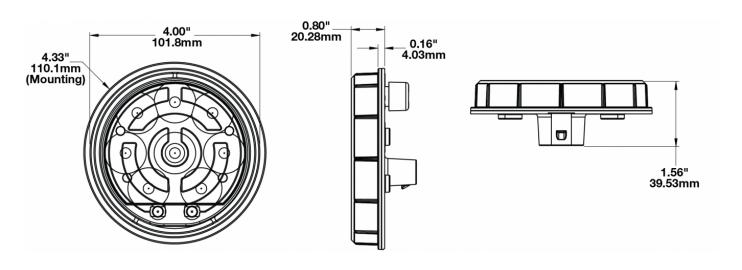

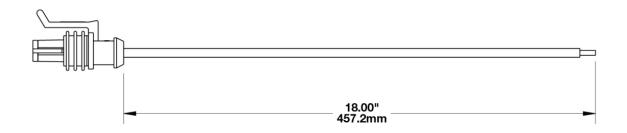

Pin Out Information



Black Wire**

(Heater)

*Wire harness sold separately on Part # 0346471. Wire harness included on Part # 0346474. Also available as a single accessory (Part # 3270501)

**To operate heating circuit on the Reverse Lamp, a separate constant 12V DC power line must be wired.

Print date: 2025-07-03

J.W. SPEAKER.

Engineered. Lighting. Solutions.

ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage10-32V DCWhite WireGroundBlack WireHeaterRed WireTurn

Current Draw 0.65A @ 12V DC (Reverse)

0.65A @ 24V DC (Reverse)

1.5A @ 12V DC (Reverse Heated) 1.5A @ 24V DC (Reverse Heated)

REGULATORY STANDARDS COMPLIANCE













Buy America Standards Ecc FMVSS 108 s7.6 (Table XII) IEC

Eco Friendly IEC IP69K

SAE J593

APPLICATIONS











INSTALLATION & APPLICATION INFORMATION

Installation requires the white wire (Heater) to be powered in order for the heater to work. If power is not supplied to the heater, the light will not be heated. Current Draws will differ based upon whether or not the heater is active. Turn off power before installing.



SMARTHEAT™ HEATING SYSTEM

The SmartHeat[™] heating system senses ambient temperature and turns the integrated heating system in the lens on & off. This system actually clears ice & snow twice as fast as conventional halogen lamps.

When does the heater turn on?

Heater turns on or off according to temperature changes and vehicle power:

- · Heater will turn on when temperatures drop, generating enough heat to prevent ice build-up.
- Heater will turn on when powering up, de-icing the light as rapidly as possible.

When does the heater turn off?

Heater will turn off when it senses temperatures increase and are above the high temperature threshold.

Learn more about this technology <u>here</u>.

See Additional Information on page 1 for heated wire installation

PRODUCT WARNINGS

For California residents:

▲ **WARNING:** Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES



<u>Part Number</u> <u>4242731</u>

4" Round Rubber Mounting Grommet for Model 234



Part Number **5869401**

4" Round Plastic Mounting Flange for Model 234



Part Number 8200441

4" Round Stainless Steel Trim Ring for Model 234



<u>Part Number</u> 8200451

4" Round Chrome Plastic Trim Ring for Model 234



Part Number 3270501

3-Pin AMP Connector Wire Harness Assembly

Print date: 2025-07-03

RELATED PRODUCTS



Part Number 0346261 12-24V DOT LED Heated Red Stop, Tail, & Turn Light



Part Number 0346264 12-24V DOT LED Heated Red Stop, Tail, & Turn Light Kit with Harness



Part Number 0346421 12-48V DOT LED Non-Heated Stop & Tail Light



Part Number 0346471 12-24V DOT LED **Heated White Reverse** Light



Part Number 0347811 12-24V DOT LED **Heated Amber Turn** Signal



Part Number 0347814 12-24V DOT LED **Heated Amber Turn** Signal Kit with Harness & Turn Light



Part Number 0347861 12-24V DOT LED Non-Heated Red Stop, Tail,



0347864 12-24V DOT LED Non-Heated Red Stop, Tail, & Turn Light Kit with Harness