


LED Amber Flashing Warning Light - Model 146

PRODUCT INFORMATION

Description	12-48V LED Amber Flashing Warning Light
Height	32.26 mm / 1.27 in
Width	85.09 mm / 3.35 in
Depth	65.02 mm / 2.56 in
Shape	Round
Outer Lens Material	Polycarbonate
Outer Lens Color	Amber
Housing Material	Polycarbonate
Housing Color	Black
Mounting Type	Low Profile Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	6" Bare Leads
Product Weight	0.34 lbs / 0.15 kgs
Shipping Weight	0.34 lbs / 0.15 kgs



PRODUCT DIMENSIONS

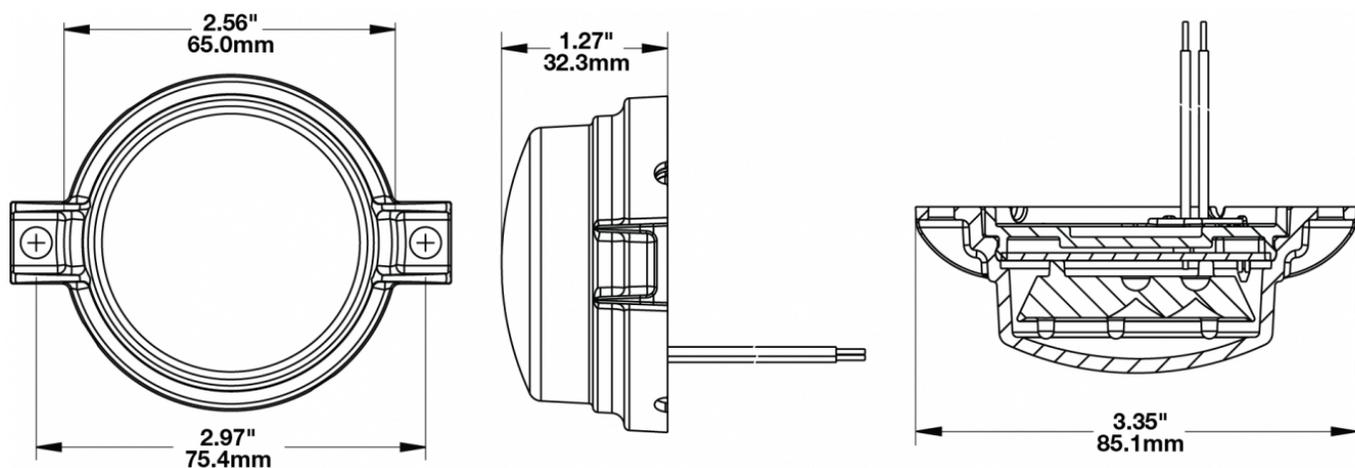

Print date: 2026-03-26

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Amber Flashing Warning Light - Model 146

ELECTRICAL SPECIFICATIONS

Input Voltage	12-48V DC
Black Wire	Neutral
Current Draw	0.075 - 0.100 A @ 12V DC 0.035 - 0.050 A @ 24V DC 0.020 - 0.035 A @ 36V DC 0.018 - 0.030 A @ 48V DC

REGULATORY STANDARDS COMPLIANCE



Buy America Standards
IEC IP67

Eco Friendly
UL Recognized

PHOTOMETRIC SPECIFICATIONS

Beam Pattern(s) Warning - Flashing Warning

APPLICATIONS



PRODUCT WARNINGS

For California residents:

⚠️ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠️ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2026-03-26

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
Engineered. Lighting. Solutions.