


LED Signal Lights - Model 220

PRODUCT INFORMATION

| | |
|--------------------------------------|---|
| Description | 12-24V ECE LED Stop, Tail & Turn Signal Light |
| Height | 160.78 mm / 6.33 in |
| Width | 66.04 mm / 2.6 in |
| Depth | 27.94 mm / 1.1 in |
| Shape | Rectangle |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Polycarbonate |
| Housing Color | Black |
| Mounting Type | Panel Mount |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Connector or Wiring | Integral DT04-6P |
| Mating Connector | DT06-6S |
| Product Weight | 0.40 lbs / 0.18 kgs |
| Shipping Weight | 2.40 lbs / 1.09 kgs |
| Additional Information | Includes an ECE Reg 3 Class 1 Reflex. |



PRODUCT DIMENSIONS

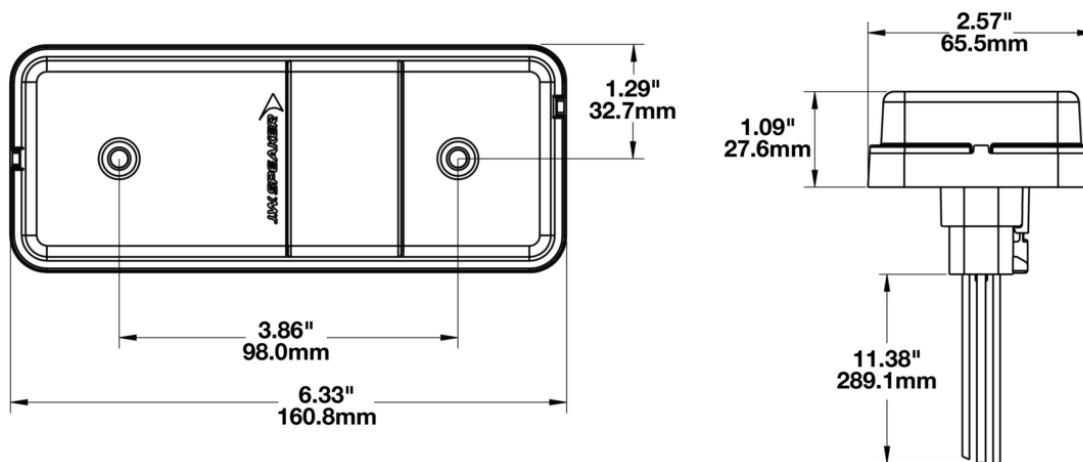

Print date: 2026-06-19

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660


J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Signal Lights - Model 220

ELECTRICAL SPECIFICATIONS

| | |
|-----------------------------------|--|
| Input Voltage | 12-24V DC |
| Operating Voltage | 6-32V DC |
| Transient Spike Protection | 150V Peak @ 1 HZ-100 Pulses |
| Black Wire | Ground |
| White Wire | Reverse |
| Red Wire | Stop |
| Brown Wire | Tail |
| Yellow Wire | Turn |
| Current Draw | 0.16A @ 12V DC (Stop) 0.10A @ 24V DC (Stop) 0.02A @ 12V DC (Tail) 0.01A @ 24V DC (Tail) 1.42A @ 12V DC (Turn) 0.71A @ 24V DC (Turn) 0.14A @ 12V DC (Backup) 0.07A @ 24V DC (Backup) |

REGULATORY STANDARDS COMPLIANCE

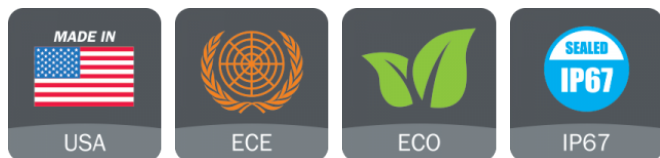

| | |
|-----------------------|--------------|
| Buy America Standards | ECE Reg 23 |
| ECE Reg 3 | ECE Reg 6 |
| ECE Reg 7 | Eco Friendly |
| IEC IP67 | |

PHOTOMETRIC SPECIFICATIONS

| | |
|------------------------|---|
| Beam Pattern(s) | Signalization - Stop Signalization - Tail Signalization - Turn (Rear) |
|------------------------|---|

Print date: 2026-06-19

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Signal Lights - Model 220

APPLICATIONS



PRODUCT WARNINGS

For California residents:

⚠ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.